



Simply Built to Last

KX 40 PRO LINE

230V / 1~ / 50HZ.
115V / 1~ / 60Hz 230V / 1~ / 60Hz

FRONT LOADING DISWASHER

FEATURES

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND PRESSED GUIDES.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
 - SPECIAL GLASSWARE PROGRAM (FOR OPTIMAL FINISH WITH CRYSTAL-CLEAR TRANSPARENCY)
 - SHORT CYCLE
 - PLATES CYCLE
 - LONG CYCLE FOR UTENSILS
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- ROTATING WASH AND RINSE ARMS PRESSED IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- DOUBLE FILTER SYSTEM, OUTER POLYPROPYLENE FILTER AND INNER STAINLESS STEEL BASKET-TYPE FILTER.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.
- PREPARED FOR CONNECTION TO AN OSMOSIS UNIT, REQUIRED TO ACHIEVE OPTIMAL FINISH WITH THE SPECIAL GLASSWARE PROGRAM.
- DISPLAY FOR WASH AND RINSE TEMPERATURES.
- FULLY CONSTRUCTED IN AISI 304 STAINLESS STEEL, DURABLE AND 100% RECYCLABLE, REDUCING PLASTIC PARTS USAGE BY 80%.



INCLUDED OPTIONS:

- DD** PRECISE ELECTRONIC CHEMICALS REGULATION VIA INTEGRATED DOSERS.
- PTCR** RINSING SYSTEM AT CONSTANT TEMPERATURE AND PRESSURE. SUITABLE FOR LOCATIONS WITH INSUFFICIENT NET WATER PRESSURE < 2 BAR
- TS** THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME, STARTING THE RINSE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.
- SWS** SOFT WASHING START, SISTEMA DE ARRANQUE LENTO DEL LAVADO PARA EVITAR POSIBLES ROTURAS DE CRISTALERÍA.

	 RACK DIMENSIONS mm.	 CYCLE TIME min	 PRODUCTION WINE GLASSES/HOUR uds.	 PRODUCTION PLATES/HOUR uds.	 USABLE HEIGHT mm.	 WASHING TANK CAPACITY L.	 BOILER CAPACITY L.	 MEASURES mm	 WEIGHT Kg.
KX 40	400 x 400	4 PROGRAMS	360	-	290	18	4		47

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER



PERISTALTIC
DETERGENT DISPENSER

PTCR
CONSTANT-TEMP &
PRESSURE RINSE SYSTEM

SWS
SOFT WASHING START

NOT INCLUDED



DRAIN PUMP

AB
AIR BREAK

OS
OSMOSIS UNIT


ACCESSORIES

INCLUDED



GLASSES ROD RACK
CINAC003445

NOT INCLUDED



BASE
250 - LV000113
400 - LV000283




UNIVERSAL ROD RACK
CINAC003457



PLATES ROD RACK
CINAC003434

TECHNICAL SCHEME

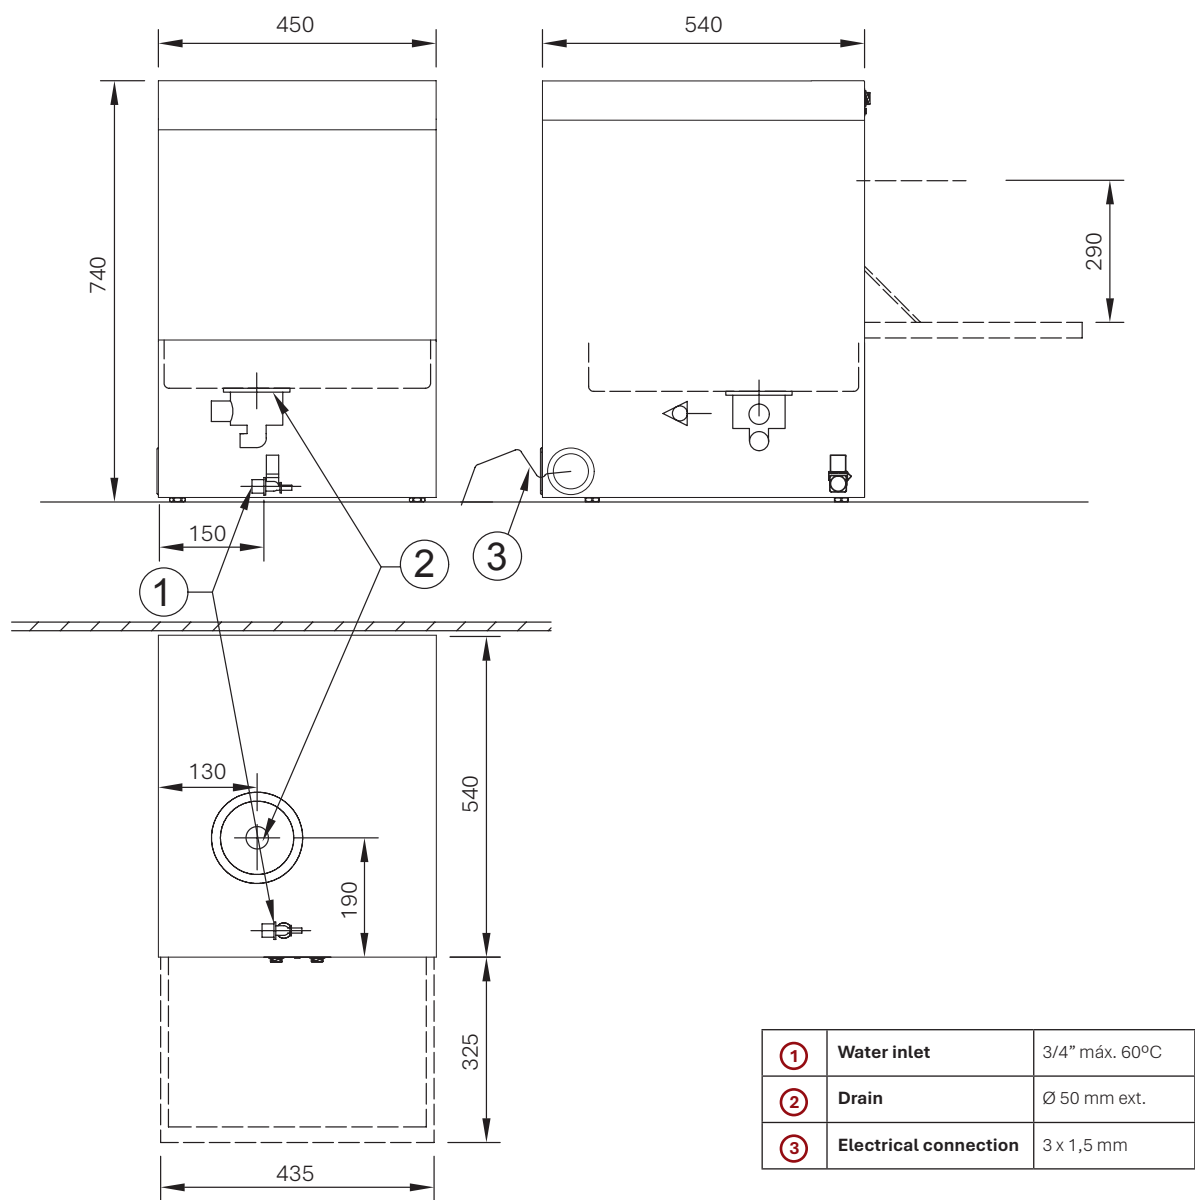

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE L.	 PRESSURE FOR THE WATER SUPPLY bar. / kPa.	 WASH PUMP POWER kW.	 TANK ELEMENT HEATER kW. / Ph.	 BOILER ELEMENT HEATER kW. / Ph.	 TOTAL POWER kW.	 CABLE LENGHT m.	 FUSE A	 PACKED MEASURES mm	 PACKED WEIGHT Kg.
KX 40	2,3	2-4 / 200 - 400	0,11	2,4 / 2~	3 / 2~	3,11	1,5 3 x 1,5 - 230 V	14,5	615 880 510	±58