



Simply Built to Last

## KX 50 3P PRO LINE

400V / 3~ / 50HZ.

230V / 3~ / 60Hz

### FRONT LOADING DISWASHER

#### FEATURES

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND PRESSED GUIDES.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
  - SPECIAL GLASSWARE PROGRAM (FOR OPTIMAL FINISH WITH CRYSTAL-CLEAR TRANSPARENCY)
  - SHORT CYCLE
  - PLATES CYCLE
  - LONG CYCLE FOR UTENSILS
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- ROTATING WASH AND RINSE ARMS PRESSED IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- DOUBLE FILTER SYSTEM, OUTER POLYPROPYLENE FILTER AND INNER STAINLESS STEEL BASKET-TYPE FILTER.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.
- PREPARED FOR CONNECTION TO AN OSMOSIS UNIT, REQUIRED TO ACHIEVE OPTIMAL FINISH WITH THE SPECIAL GLASSWARE PROGRAM.
- DISPLAY FOR WASH AND RINSE TEMPERATURES.
- FULLY CONSTRUCTED IN AISI 304 STAINLESS STEEL, DURABLE AND 100% RECYCLABLE, REDUCING PLASTIC PARTS USAGE BY 80%.

#### INCLUDED OPTIONS:

- DD** PRECISE ELECTRONIC CHEMICALS REGULATION VIA INTEGRATED DOSERS.
- PTCR** RINSING SYSTEM AT CONSTANT TEMPERATURE AND PRESSURE. SUITABLE FOR LOCATIONS WITH INSUFFICIENT NET WATER PRESSURE < 2 BAR
- TS** THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME, STARTING THE RINSE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.
- SWS** SOFT WASHING START, SISTEMA DE ARRANQUE LENTO DEL LAVADO PARA EVITAR POSIBLES ROTURAS DE CRISTALERÍA.



|          | <br>RACK DIMENSIONS<br>mm. | <br>CYCLE TIME<br>min | <br>PRODUCTION<br>WINE GLASSES/HOUR<br>uds. | <br>PRODUCTION<br>PLATES/HOUR<br>uds. | <br>USABLE HEIGHT<br>mm. | <br>WASHING TANK CAPACITY<br>L. | <br>BOILER CAPACITY<br>L. | <br>MEASURES<br>mm | <br>WEIGHT<br>Kg. |
|----------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| KX 50 3P | 500 x 500                                                                                                     | 4 PROGRAMAS                                                                                              | 600                                                                                                                            | 480                                                                                                                      | 360                                                                                                         | 26                                                                                                                   | 6                                                                                                              |                    | 60                                                                                                     |

#### OPTIONS

##### INCLUDED



PERISTALTIC  
RINSE AID DISPENSER



PERISTALTIC  
DETERGENT DISPENSER

**PTCR**

CONSTANT-TEMP &  
PRESSURE RINSE SYSTEM

**SWS**

SOFT WASHING START

##### NOT INCLUDED



DRAIN PUMP

**AB**

AIR BREAK

**OS**

OSMOSIS UNIT


#### ACCESSORIES

##### INCLUDED



2 X CESTA GLASS ROD RACK  
CINAC010668

##### NOT INCLUDED



BASE  
P25 - LV000114  
P40 - LV000115




UNIVERSAL ROD RACK  
CINAC003464



PLATES ROD RACK  
CINAC003436

TECHNICAL SCHEME

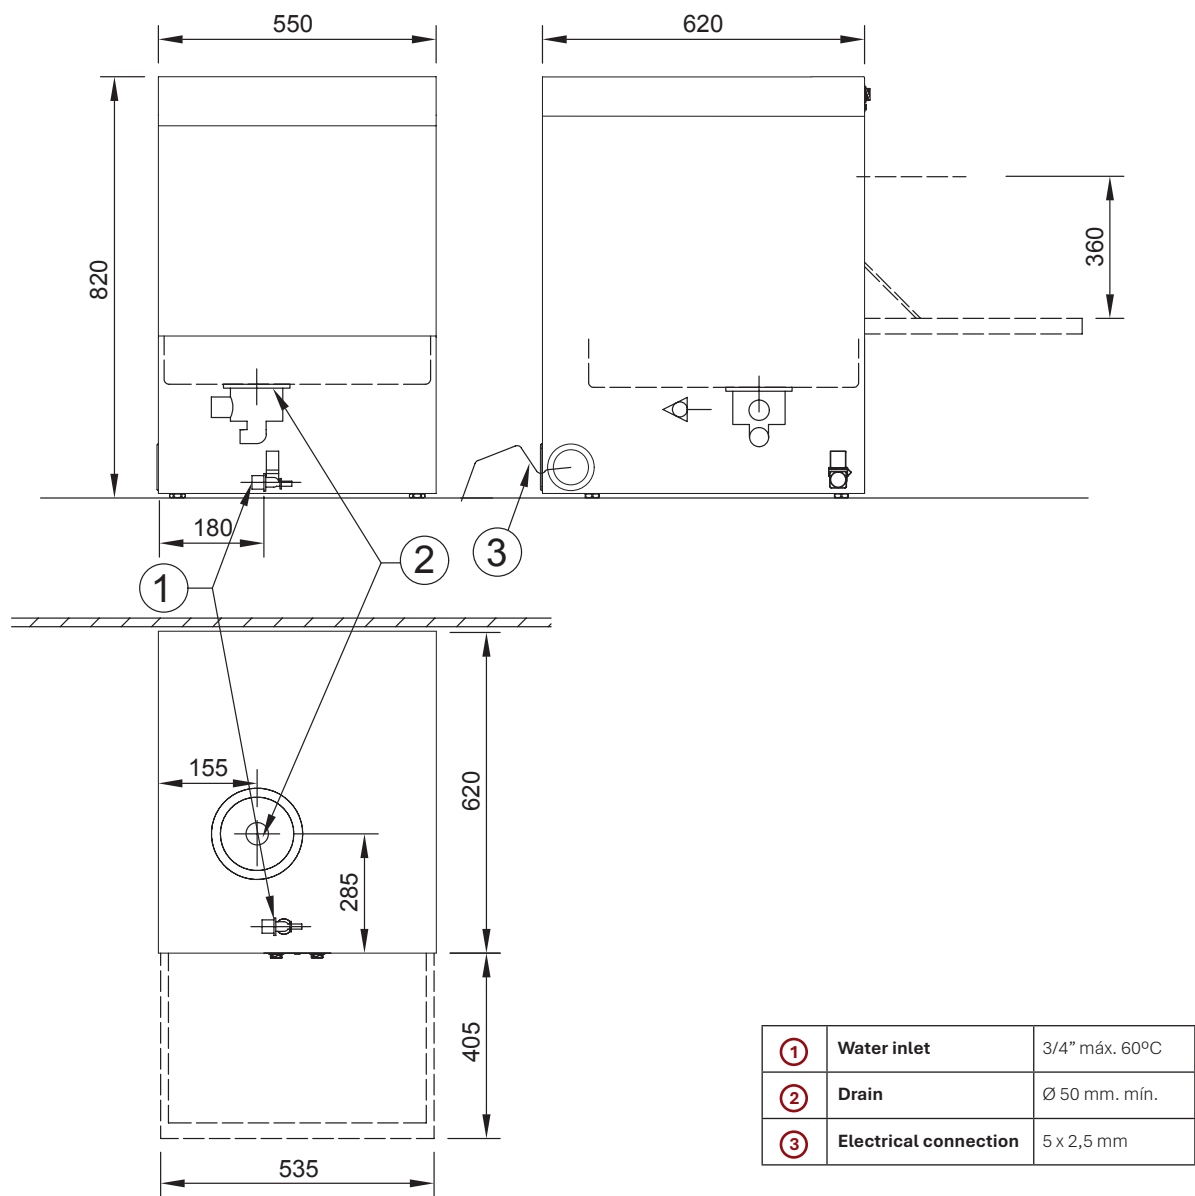

OPERATING CONDITIONS

|          | <br>WATER CONSUMPTION<br>BY CYCLE<br>L. | <br>PRESSURE FOR<br>THE WATER SUPPLY<br>bar. / kPa. | <br>WASH PUMP POWER<br>kW. | <br>TANK ELEMENT HEATER<br>kW. / Ph. | <br>BOILER ELEMENT HEATER<br>kW. / Ph. | <br>TOTAL POWER<br>kW. | <br>CABLE LENGHT<br>m. | <br>FUSE<br>A | <br>PACKED MEASURES<br>mm | <br>PACKED WEIGHT<br>Kg. |
|----------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| KX 50 3P | 2,3                                                                                                                        | 2-4 / 200 - 400                                                                                                                        | 0,28                                                                                                          | 4,5 / 3~                                                                                                                | 6 / 3~                                                                                                                    | 6,25                                                                                                      | 1,5<br>5 x 2,5 - 400 V<br>4 x 4 - 230 V                                                                     | 10,1                                                                                               | 960<br>700<br>615                                                                                              | ±77                                                                                                           |