



Simply Built to Last

KX 50 PRO LINE

230V / 1~ / 50HZ.
115V / 1~ / 60Hz 230V / 1~ / 60Hz

FRONT LOADING DISWASHER

FEATURES

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND PRESSED GUIDES.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
 1. SPECIAL GLASSWARE PROGRAM (FOR OPTIMAL FINISH WITH CRYSTAL-CLEAR TRANSPARENCY)
 2. SHORT CYCLE
 3. PLATES CYCLE
 4. LONG CYCLE FOR UTENSILS
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- ROTATING WASH AND RINSE ARMS PRESSED IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- DOUBLE FILTER SYSTEM, OUTER POLYPROPYLENE FILTER AND INNER STAINLESS STEEL BASKET-TYPE FILTER.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.
- PREPARED FOR CONNECTION TO AN OSMOSIS UNIT, REQUIRED TO ACHIEVE OPTIMAL FINISH WITH THE SPECIAL GLASSWARE PROGRAM.
- DISPLAY FOR WASH AND RINSE TEMPERATURES.
- FULLY CONSTRUCTED IN AISI 304 STAINLESS STEEL, DURABLE AND 100% RECYCLABLE, REDUCING PLASTIC PARTS USAGE BY 80%.

INCLUDED OPTIONS:

- DD** PRECISE ELECTRONIC CHEMICALS REGULATION VIA INTEGRATED DOSERS.
- PTCR** RINSING SYSTEM AT CONSTANT TEMPERATURE AND PRESSURE. SUITABLE FOR LOCATIONS WITH INSUFFICIENT NET WATER PRESSURE < 2 BAR
- TS** THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME, STARTING THE RINSE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.
- SWS** SOFT WASHING START, SISTEMA DE ARRANQUE LENTO DEL LAVADO PARA EVITAR POSIBLES ROTURAS DE CRISTALERÍA.



	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION WINE GLASSES/HOUR uds.	PRODUCTION PLATES/HOUR uds.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm	WEIGHT Kg.
KX 50	500 x 500	4 PROGRAMS	600	480	380	26	6	550 820 620	58

OPTIONS

INCLUDED



NOT INCLUDED




ACCESSORIES

INCLUDED



2 X CESTA GLASS ROD RACK
CINAC010668

NOT INCLUDED



BASE
P25 - LV000114
P40 - LV000115




UNIVERSAL ROD RACK
CINAC003464



PLATES ROD RACK
CINAC003436

TECHNICAL SCHEME

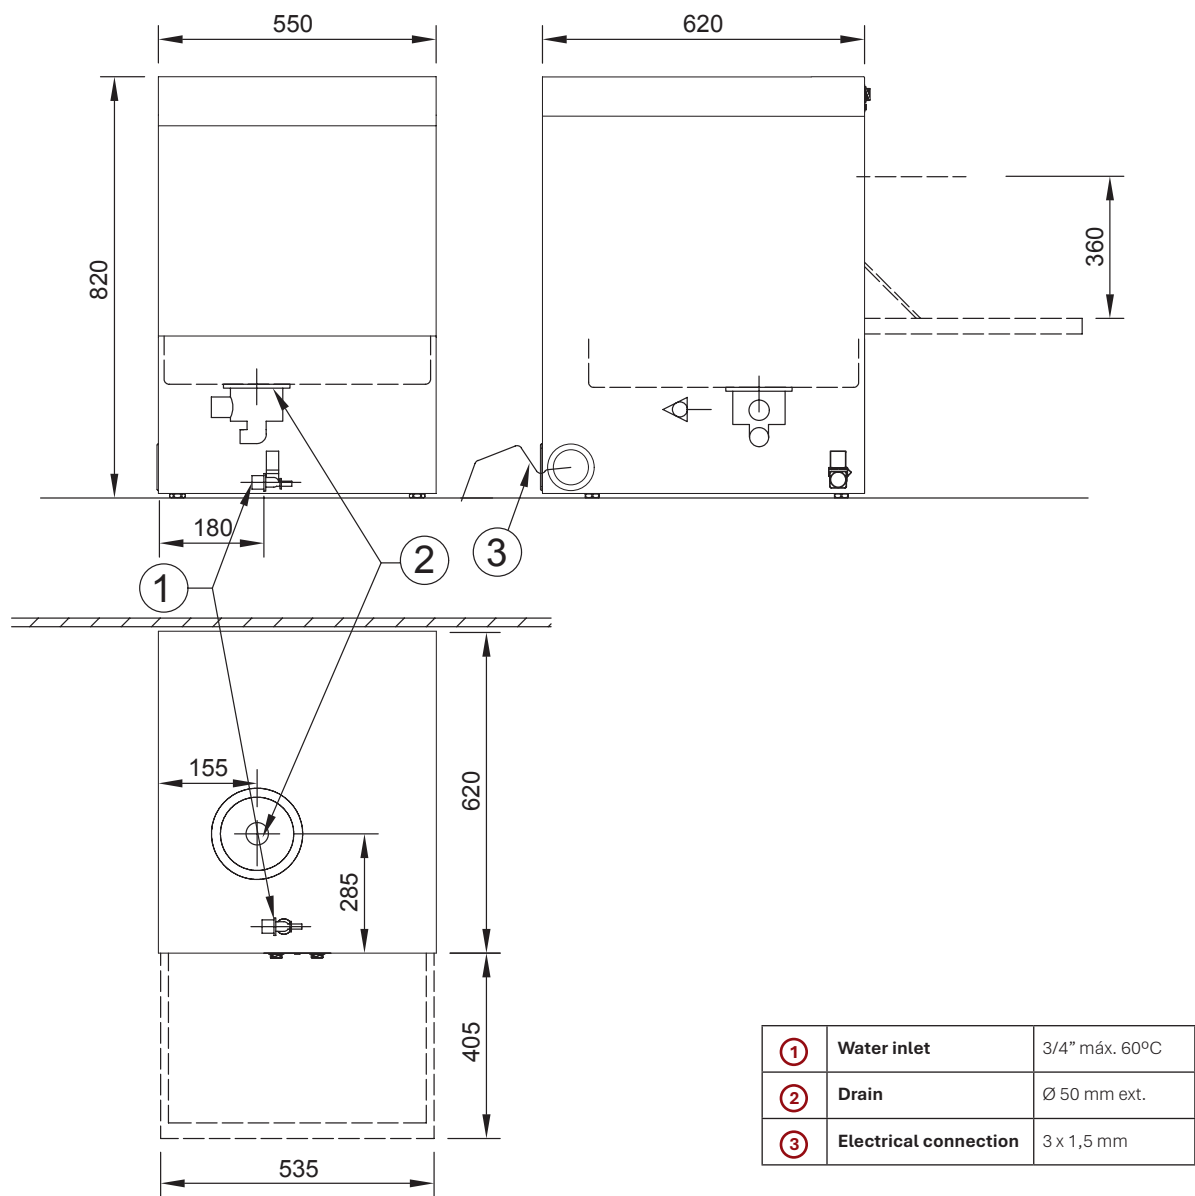

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE L.	 PRESSURE FOR THE WATER SUPPLY bar. / kPa.	 WASH PUMP POWER kW.	 TANK ELEMENT HEATER kW. / Ph.	 BOILER ELEMENT HEATER kW. / Ph.	 TOTAL POWER kW.	 CABLE LENGHT m.	 FUSE A	 PACKED MEASURES mm	 PACKED WEIGHT Kg.
KX 50	2,3	2-4 / 200 - 400	0,28	2,4 / 2~	3 / 2~	3,28	1,5 3 x 1,5 - 230 V	14,4	700 960 615	±75