



Simply Built to Last

KX 83 PRO LINE

400V / 3~ / 50HZ.

230V / 3~ / 60Hz

PASS THROUGH

FEATURES

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
 1. SPECIAL GLASSWARE QUALITY CYCLE (FOR OPTIMAL FINISH WITH ENHANCED GLASS TRANSPARENCY)
 2. SHORT CYCLE
 3. DISH CYCLE
 4. LONG CYCLE FOR UTENSILS
- UNIQUE MIXED WASHING SYSTEM: ROTATING UPPER WASH ARMS AND FIXED LOWER WASH ARMS, ENSURING GREATER WASHING POWER AND ACCESS TO THE MOST HARD-TO-REACH AREAS.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.

PREPARED FOR CONNECTION TO AN OSMOSIS SYSTEM. REQUIRED TO ACHIEVE OPTIMAL RESULTS IN THE SPECIAL GLASSWARE CYCLE.
- DISPLAY OF WASH AND RINSE TEMPERATURES.
- FULL CONSTRUCTION IN AISI 304 STAINLESS STEEL.

INCLUDED OPTIONS:

DD PERISTALTIC DETERGENT AND RINSE AID DISPENSERS FOR PRECISE ELECTRONIC CHEMICAL DOSING.

PTCR CONSTANT TEMPERATURE AND PRESSURE RINSE SYSTEM, IDEAL FOR LOCATIONS WITH INSUFFICIENT WATER PRESSURE (<2 BAR).

TS THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME AND STARTS THE RINSE PHASE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.

SWS SOFT WASHING START SYSTEM TO PREVENT POSSIBLE GLASS BREAKAGE.



	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION GLASSES/HOUR u.	PRODUCTION PLATES/HOUR u.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm	MEASURES WITHOUT HANDLE / OPEN mm	WEIGHT Kg.
KX 83	500 x 500	4 PROGRAMAS	600	640	440	39	8	755 1480 850	665 1940 780	125

OPTIONS

INCLUDED

PERISTALTIC RINSE AID DISPENSER

PERISTALTIC DETERGENT DISPENSER

PTCR
CONSTANT-TEMP & PRESSURE RINSE SYSTEM

TS
THERMOSTOP SYSTEM

SWS
SOFT WASHING START

NOT INCLUDED

EPS
STEAM CONDENSER + ENERGY RECOVERY

AB
AIR BREAK
(Requires PTCR installed)

DRAIN PUMP

ACCESSORIES

INCLUDED



GLASS ROD RACK
CINAC003445

NOT INCLUDED



GLASS ROD RACK
CINAC010668




UNIVERSAL ROD RACK
CINAC003464



PLATE ROD RACK
CINAC003436

TECHNICAL SCHEME

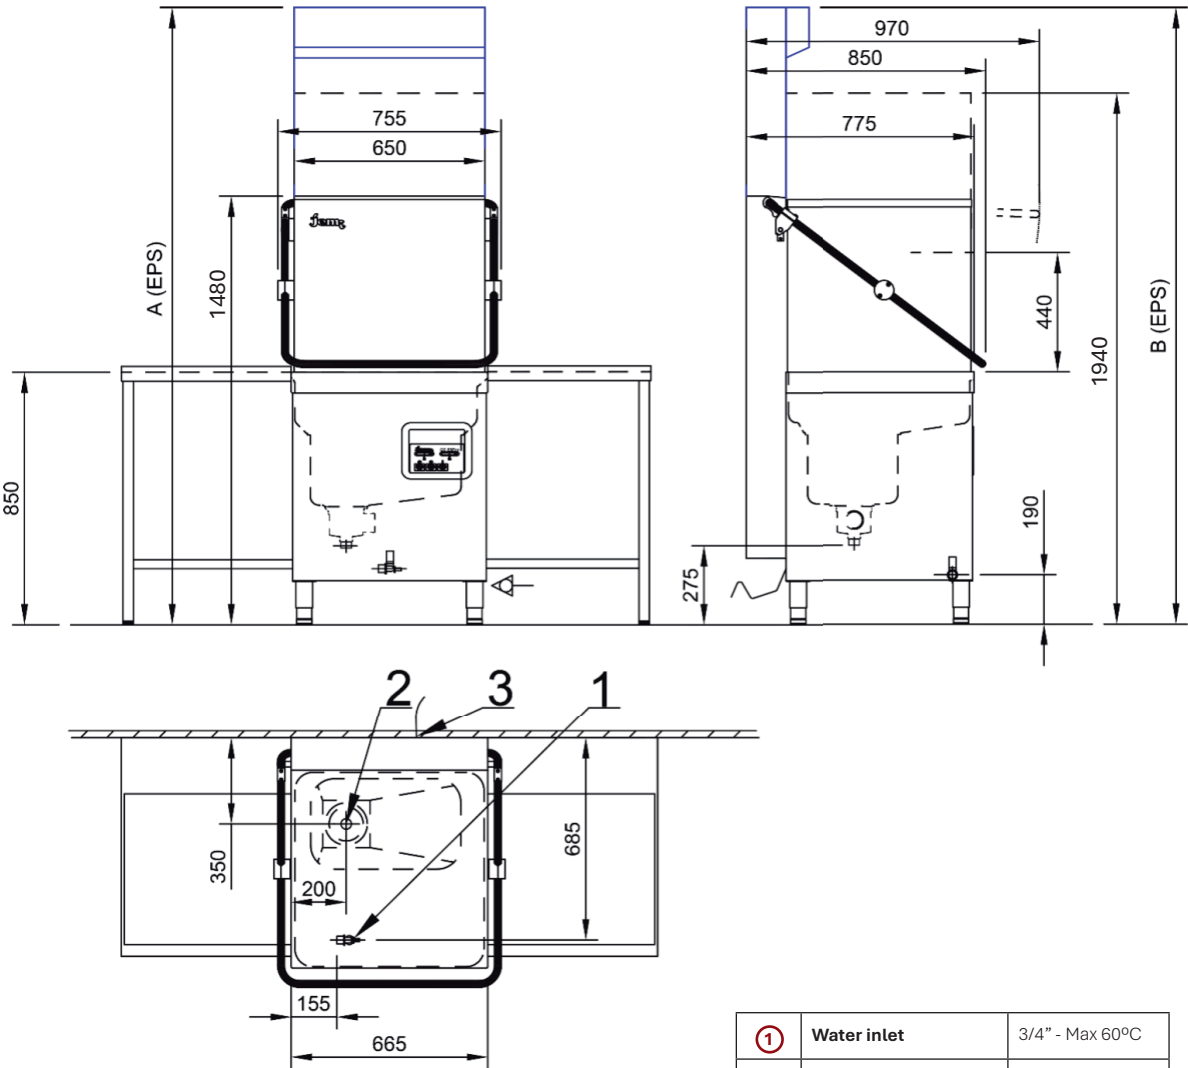

OPERATING CONDITIONS

	WATER CONSUMPTION BY CYCLE	PRESSURE FOR THE WATER SUPPLY	WASH PUMP POWER	TANK ELEMENT HEATER	BOILER ELEMENT HEATER	TOTAL POWER	CABLE LENGHT	FUSE	PACKED MEASURES	PACKED WEIGHT
	L.	bars / kpa.	Kw.	Kw. / Ph.	Kw. / Ph.	Kw.	m.	A	mm	Kg.
KX 83	2,4 / 2,6	2-4 / 200 - 400	0,75	6 / III	6 / III	6,75	1,5m. 5x2,5mm².400V.III 4x4mm².230V.III	12,41	 1620 820 860	±160