



Simply Built to Last

KX 83 PRO LINE

400V / 3~ / 50HZ.

230V / 3~ / 60Hz

LAVAVAJILLAS DE CÚPULA

CARACTERÍSTICAS

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
 - SPECIAL GLASSWARE QUALITY CYCLE (FOR OPTIMAL FINISH WITH ENHANCED GLASS TRANSPARENCY)
 - SHORT CYCLE
 - DISH CYCLE
 - LONG CYCLE FOR UTENSILS
- UNIQUE MIXED WASHING SYSTEM: ROTATING UPPER WASH ARMS AND FIXED LOWER WASH ARMS, ENSURING GREATER WASHING POWER AND ACCESS TO THE MOST HARD-TO-REACH AREAS.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.

PREPARED FOR CONNECTION TO AN OSMOSIS SYSTEM. REQUIRED TO ACHIEVE OPTIMAL RESULTS IN THE SPECIAL GLASSWARE CYCLE.
- DISPLAY OF WASH AND RINSE TEMPERATURES.
- FULL CONSTRUCTION IN AISI 304 STAINLESS STEEL.

INCLUDED OPTIONS:

- DD** PERISTALTIC DETERGENT AND RINSE AID DISPENSERS FOR PRECISE ELECTRONIC CHEMICAL DOSING.
- PTCR** CONSTANT TEMPERATURE AND PRESSURE RINSE SYSTEM, IDEAL FOR LOCATIONS WITH INSUFFICIENT WATER PRESSURE (<2 BAR).
- TS** THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME AND STARTS THE RINSE PHASE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.
- SWS** SOFT WASHING START SYSTEM TO PREVENT POSSIBLE GLASS BREAKAGE.



	 DIMENSIONES CESTA mm.	 CICLO min	 PRODUCCIÓN COPAS / HORA u.	 PRODUCCIÓN PLATOS / HORA u.	 ALTURA ÚTIL mm.	 CAPACIDAD CUBA LAVADO L.	 CAPACIDAD CALDERÍN L.	 DIMENSIONES mm	 DIMENSIONES SIN ASA / ABIERTA mm	 PESO Kg.
KX 83	500 x 500	4 PROGRAMAS	600	640	440	39	8			125

OPCIONES

INCLUIDAS



DOSIFICADOR
PERISTÁLTICO DE
ABRILLANTADOR



DOSIFICADOR
PERISTÁLTICO DE
DETERGENTE

PTCR

SISTEMA DE ACLARADO A
Tª Y PRESIÓN CONSTANTE

TS

THERMOSTOP SYSTEM

SWS

SOFT WASHING
START

NO INCLUIDAS

EPS

SISTEMA PARA
RECUPERACIÓN DE
ENERGÍA

AB

AIR BREAK



BOMBA DESAGÜE

ACCESORIOS

INCLUIDOS



CESTA VARILLA COPAS
CINAC010668

NO INCLUIDAS



CESTA VARILLA COPAS
CINAC010668




CESTA UNIVERSAL VARILLAS
CINAC003465



CESTA VARILLA PLATOS
CINAC003438

ESQUEMA TÉCNICO

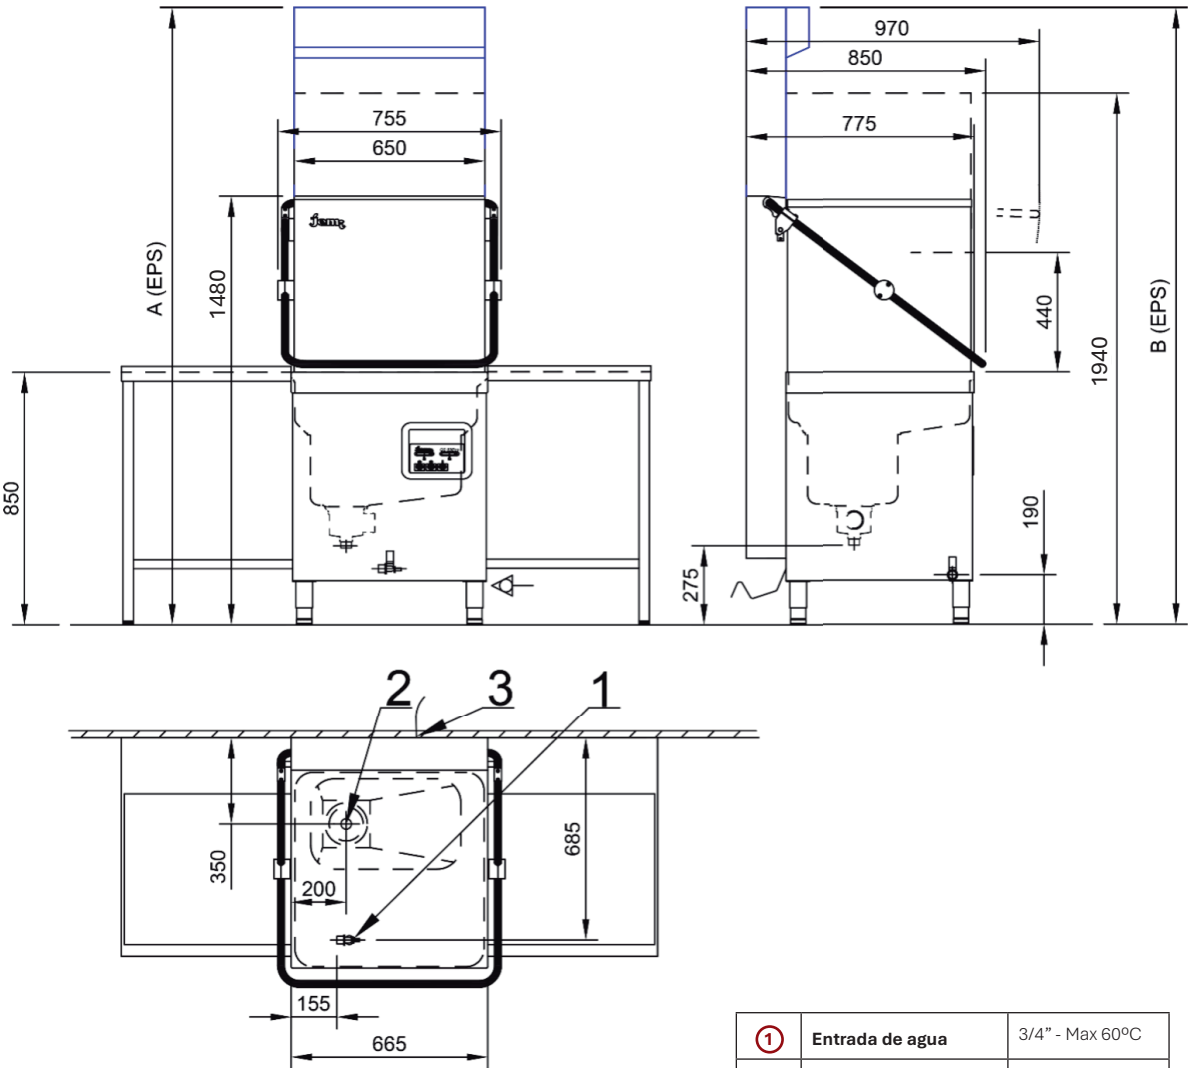

FUNCIONAMIENTO

	 CONSUMO DE AGUA POR CICLO	 PRESIÓN ALIMENTACIÓN DE AGUA	 POTENCIA MOTOR DE LAVADO	 POTENCIA RESISTENCIA CUBA	 POTENCIA RESISTENCIA CALDERÍN	 POTENCIA TOTAL	 LONGITUD CABLE	 FUSIBLE	 DIMENSIONES EMBALADO	 PESO EMBALADO
	L.	bars / kpa.	Kw.	Kw. / Ph.	Kw. / Ph.	Kw.	m.	A	mm	Kg.
KX 83	2,4 / 2,6	2-4 / 200 - 400	0,75	6 / III	6 / III	6,75	1,5m. 5x2,5mm².400V.III 4x4mm².230V.III	12,41	820 1620 860	±160