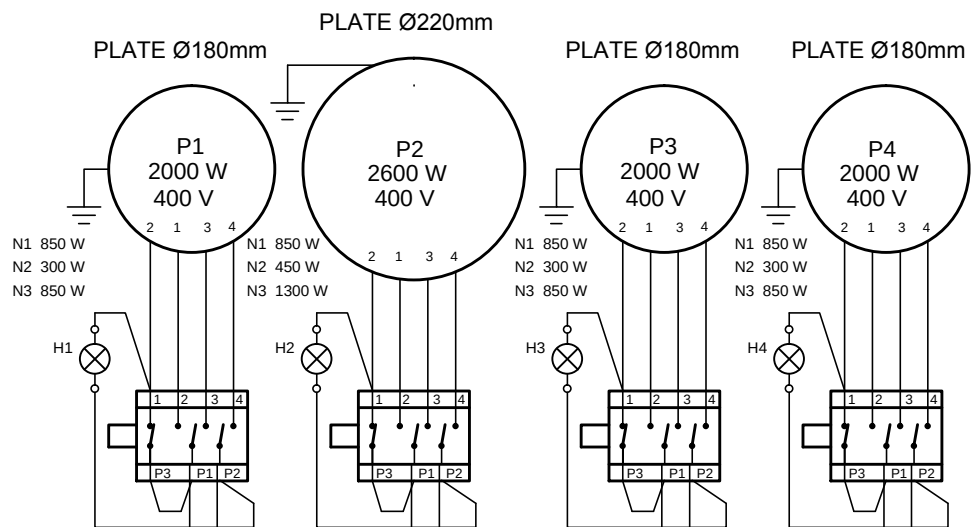


COMMUTATOR POSITIONS

CONTACTS	P3	P1	P2			
POSITION	1	2	3	4	EJE	POSITION CONTROL
0					⊕	0
1	⊗	⊗	⊗	⊗	⊕	3
2	⊗	⊗	⊗	⊗	⊕	2
3	⊗	⊗	⊗	⊗	⊕	1

COMMUTATOR
STEATITE
49.24215.000

STEATITE COMMUTATOR POSITIONS



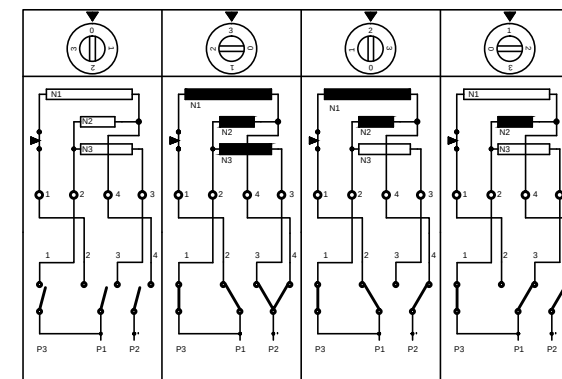


PLATE 2000 W: 2000 W 1150 W 300 W
PLATE 2600 W: 2600 W 1300 W 450 W

POWER SUPPLY CORD:
HOSE 5 x 6 mm SECTION.
WIRES ELECTRICAL INSTALLATION OF PLATES:
SILICONE PROTECTION.
4 mm² SECTION.
WIRES ELECTRICAL INSTALLATION OF OVEN:
SILICONE PROTECTION
4 mm² SECTION.

POWER SUPPLY:
400 V THREE PHASE + EARTH WIRE.
POWER: 11.600 W

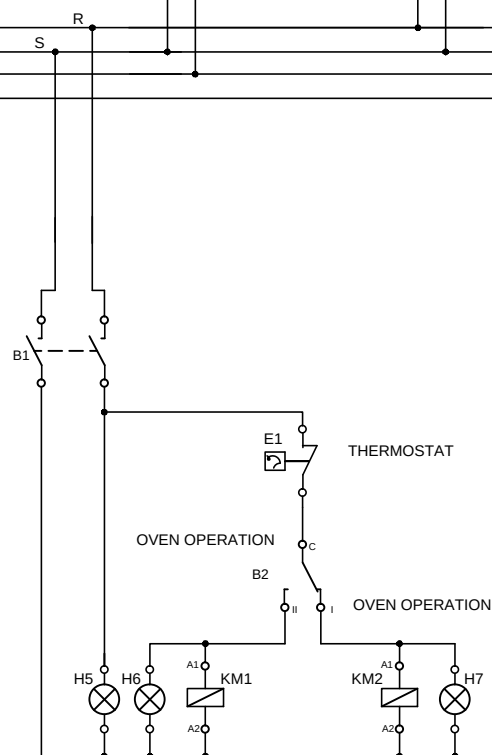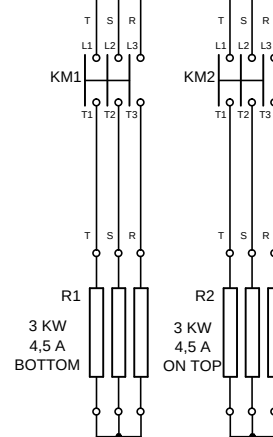

	Fecha	Nombre	ELECTRICAL COOKERS	JEMI Simply Built to Last
Dibuj.	27/07/12	J.B.S.		
Compr.				
Norma				
Escala	WIRING DIAGRAM MOD: 614EH C TREE PHASE 400 V (without neutral).			N° PLANO
Medidas sin ind. de toler. fino DIN7168				EE-614EH C 400SN
				Sustituye a: