

GSP-44


GSP-44 EPS



CHARACTERISTICS	GSP-44	GSP-44 EPS
EXTERNALS DIMENSIONS	675 x 880 x 1580 mm	675 x 880 x 1840 mm
WEIGHT	170 Kg.	190 Kg.
DIMENSIONS OF RACKS	555 x 695 x 110 mm	
USABLE HEIGHT	610 mm	
OUTPUT RACKS HOUR	30	
CYCLE TIME	2-4 min. (4 min adjustable)	
WATER CONSUMPTION BY RINSING	3 liters	
WATER INLET	3/4"	
PRESSURE FOR THE WATER SUPPLY	2 – 4 bars / 200 – 400 Kpa.	
DRAIN	Ø tube 32 mm ext.	
NUMBER OF WASH ARMS UPPER	1 (rotating)	
NUMBER OF WASH ARMS BOTTOM	4 (fixed)	
WHASING TANKS	1	
WHASING TANKS CAPACITY	45 liters	
BOILER CAPACITY	6 liters	
WASH PUMP POWER	2 kW (4.0A)	
TANK ELEMENT HEATER	6 kW Triphasic (8.67A)	
BOILER ELEMENT HEATER	6 kW Triphasic (8.67A)	
E.P.S. POWER	2 x 30 W	
TOTAL POWER	8 kW (16.67A)	8.2kW (17.07A)
VOLTAGE	400 V. / III / 50-60 Hz. 230 V. / III / 50-60 Hz.	
PACKED DIMENSIONS	850 x 1100 x 2130 mm	
PACKED WEIGHT	212 Kg.	234 Kg.

SAVING E.P.S.: The "APPLUS" testing laboratory certifies that the E.P.S. system has a consumption of 2.3 liters of water per wash while providing a saving of 1.48Kw/h. This energy saving also means a reduction in 25% of CO2 to the atmosphere.

GSP-44
GSP-44 EPS

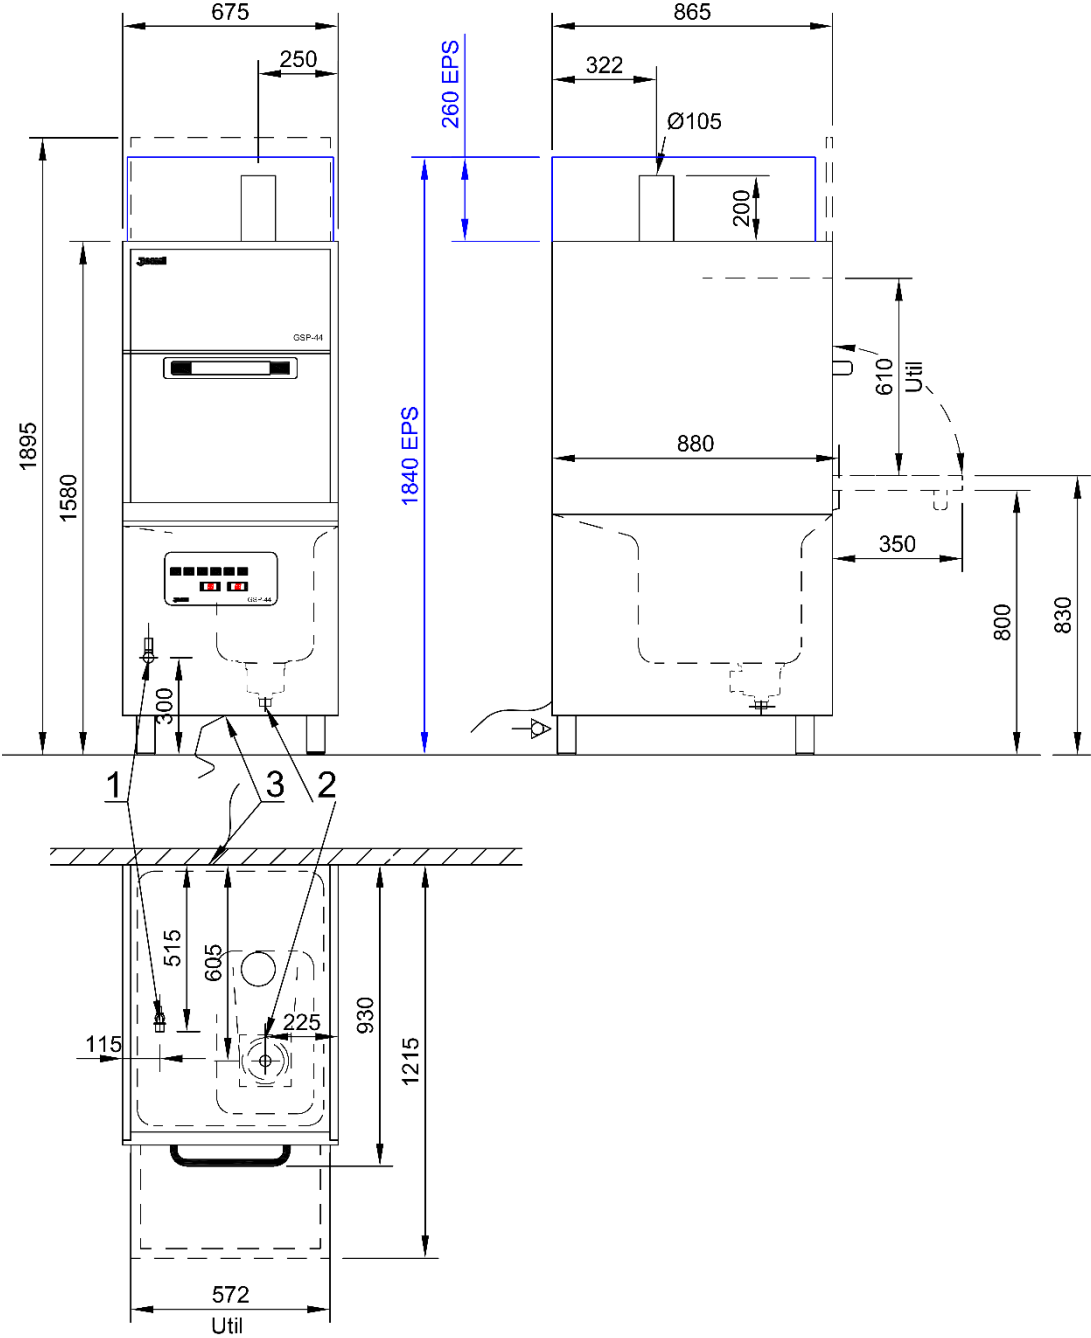

1. WATER INLET

3/4"
Max. 60°C

2. DRAIN

Ø50 mm. Min.

3. CABLE LENGHT

2.5m.
5 x 6 mm², 400V. III
4 x 10 mm², 230V III