

Selva de Mar, 122-128
 08020 Barcelona, España
 Tel. 0034 93 308 31 54
 Fax. 0034 93 303 38 73
 jemi@jemi.es
 www.jemi.es

GSP-45

GSP-45 EPS




CHARACTERISTICS	GSP-45	GSP-45 EPS
EXTERNALS DIMENSIONS	865 x 880 x 1680 mm	865 x 880 x 1940 mm
WEIGHT	210 Kg.	230 Kg.
DIMENSIONS OF RACKS	742 x 697 x 110 mm	
USABLE HEIGHT	700 mm	
OUTPUT RACKS HOUR	30	
CYCLE TIME	2-4 min. (4 min adjustable)	
WATER CONSUMPTION BY RINSING	3 liters	
WATER INLET	3/4"	
PRESSURE FOR THE WATER SUPPLY	2 – 4 bars / 200 – 400 Kpa.	
DRAIN	Ø tube 32 mm ext.	
NUMBERS OF WASH ARMS UPPER	1 (rotating)	
NUMBERS OF WASH ARMS BOTTOM	4 (fixed)	
WHASING TANKS	1	
WHASING TANKS CAPACITY	65 liters	
BOILER CAPACITY	8 liters	
WASH PUMP POWER	2.6 kW (5.8A)	
TANK ELEMENT HEATER	9 kW Triphasic (13A)	
BOILER ELEMENT HEATER	6 kW Triphasic (8.67A)	
E.P.S. POWER	2 x 30 W	
TOTAL POWER	11.6 kW (18.8A)	11.8 kW (19.2A)
VOLTAGE	400 V. / III / 50-60 Hz. 230 V. / III / 50-60 Hz.	
PACKED DIMENSIONS	1050 x 1080 x 2250 mm	
PACKED WEIGHT	280 Kg.	302 Kg.

SAVING E.P.S.: The "APPLUS" testing laboratory certifies that the E.P.S. system has a consumption of 2.3 liters of water per wash while providing a saving of 1.48Kw/h. This energy saving also means a reduction in 25% of CO2 to the atmosphere.

Ed. January 2024

GSP-45
GSP-45 EPS

ELECTRICAL AND SANITARY INSTALLATION BRANCHEMENTS

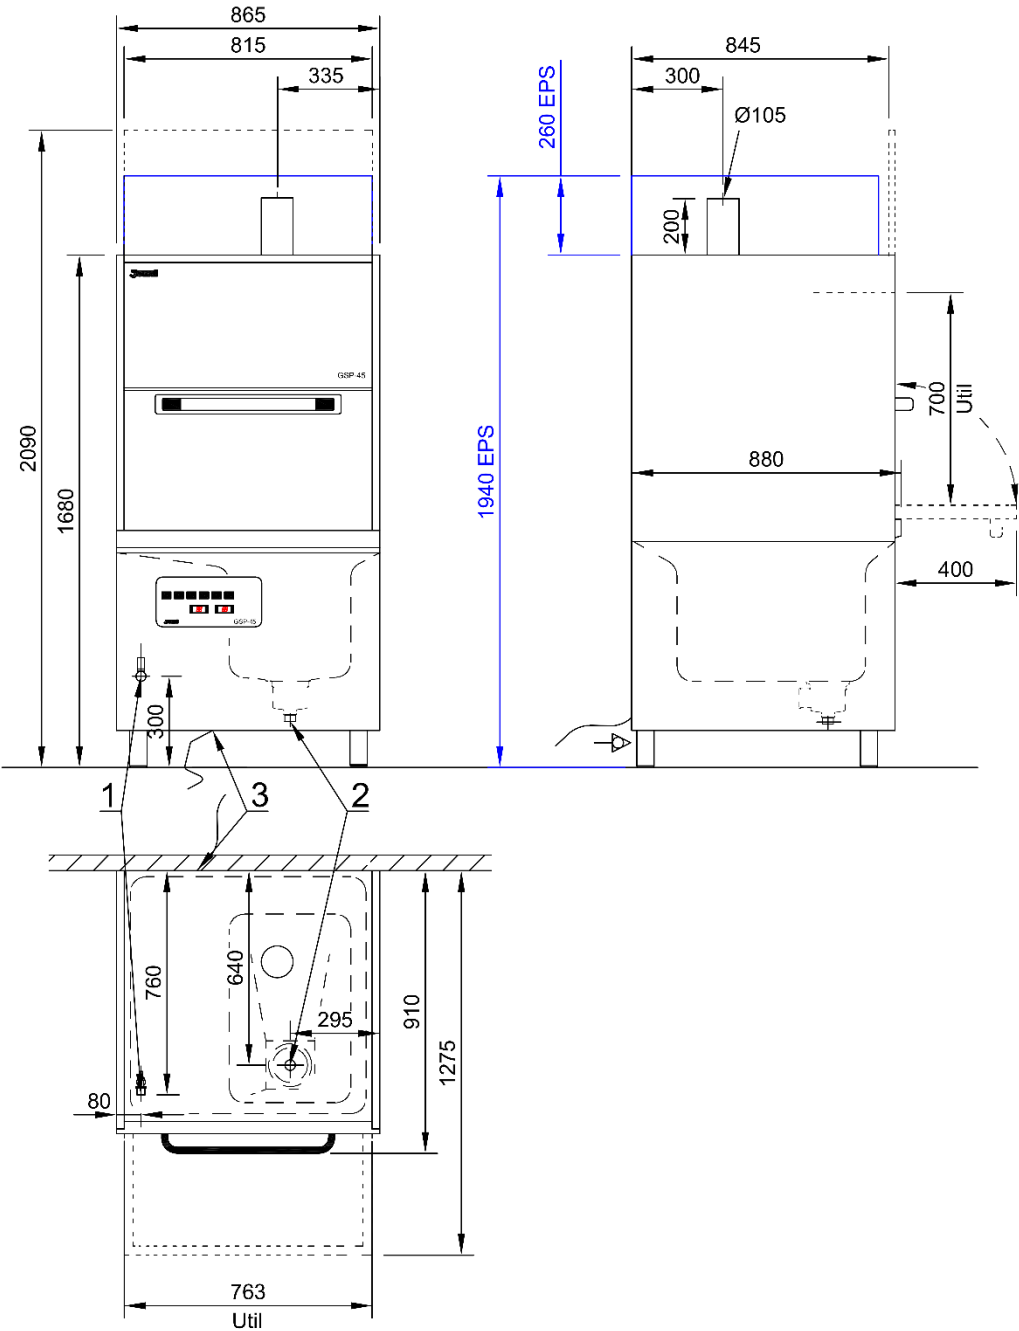

1. WATER INLET

3/4"
Máx. 60°C

2. DRAIN

Ø50 mm. Min.

3. CABLE LENGHT

2.5m.
5 x 6 mm². 400V. III
4 x 10 mm². 230V III