

GSP-46

GSP-46 EPS



Selva de Mar, 122-128
 08020 Barcelona, España
 Tel. 0034 93 308 31 54
 Fax. 0034 93 303 38 73
 jemi@jemi.es
 www.jemi.es

CHARACTERISTICS	GSP-46	GSP-46 EPS
EXTERNALS DIMENSIONS	1385 x 880 x 1680 mm	1385 x 880 x 1940 mm
WEIGHT	289 Kg.	328 Kg.
DIMENSIONS OF RACKS	1292 x 693 x 110 mm	
USABLE HEIGHT	700 mm	
OUTPUT RACKS HOUR	60	
CYCLE TIME	2-4 min. (4 min adjustable)	
WATER CONSUMPTION BY RINSING	3 + 3 liters	
WATER INLET	3/4"	
PRESSURE FOR THE WATER SUPPLY	2 – 4 bars / 200 – 400 Kpa.	
DRAIN	Ø tube 32 mm ext.	
NUMBERS OF WASH ARMS UPPER	1 + 1 (rotating)	
NUMBERS OF WASH ARMS BOTTOM	4 + 4 (fixed)	
WHASING TANKS	1	
WHASING TANKS CAPACITY	98 liters	
BOILER CAPACITY	2 x 8 liters	
WASH PUMP POWER	2 x 2.6 kW (11.6 A)	
TANK ELEMENT HEATER	9 kW Triphasic (13A)	
BOILER ELEMENT HEATER	12 kW Triphasic (17.34A)	
E.P.S. POWER	2 x 30 W	
TOTAL POWER	17.2 kW (28.9A)	17.4 kW (29.3A)
VOLTAGE	400 V. / III / 50-60 Hz. 230 V. / III / 50-60 Hz.	
PACKED DIMENSIONS	1050 x 1080 x 2250 mm	
PACKED WEIGHT	280 Kg.	302 Kg.


SAVING E.P.S.: The "APPLUS" testing laboratory certifies that the E.P.S. system has a consumption of 2.3 liters of water per wash while providing a saving of 1.48Kw/h. This energy saving also means a reduction in 25% of CO2 to the atmosphere.

Ed. January 2024

GSP-46

GSP-46 EPS

ELECTRICAL AND SANITARY INSTALLATION BRANCHEMENTS

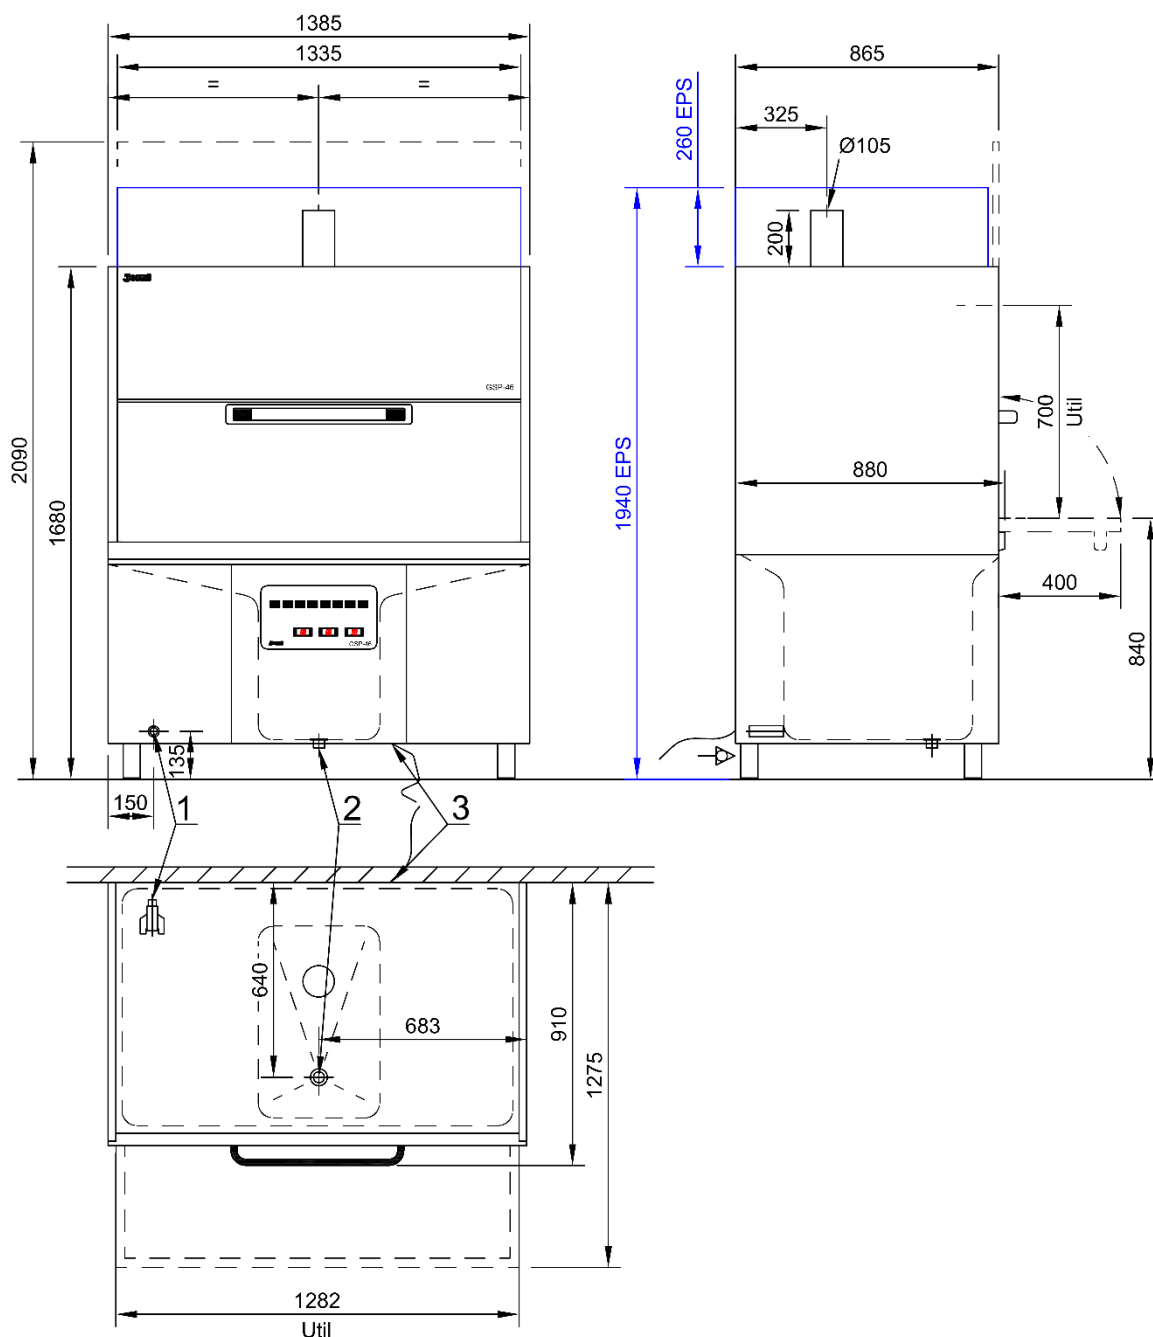

1. WATER INLET

3/4"
Máx. 60°C

2. DRAIN

Ø50 mm. Min.

3. CABLE LENGHT

2.5m.
5 x 6 mm², 400V. III
4 x 10 mm², 230V III