

GS 102 ML TECH LINE

PASS THROUGH DISHWASHER

400V / 3~ / 50HZ.
230V / 3~ / 60Hz

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- 1-2 MINUTE PROGRAM
- FIXED ARM WASHING SYSTEM. FIXED WASH ARMS IN HIGH-RESISTANCE POLYPROPYLENE.
- TRIPLE FILTER FEATURING A STAINLESS STEEL OUTER LAYER AND POLYPROPYLENE INNER DOUBLE LAYERS.
- DIGITAL DISPLAYS FOR MONITORING WASH AND RINSE TEMPERATURES.
- LARGE WATER CAPACITY IN THE TANK WITHOUT THE NEED FOR WATER CHANGES DURING SERVICE.
- FULLY CONSTRUCTED IN AISI 304 STAINLESS STEEL.



MODELO	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION PLATES/HOUR uds.	PRODUCTION GN PASTRY TRAYS/HOUR uds.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm	MEASURES WITHOUT HANDLE / OPEN mm	WEIGHT Kg.
GS 102 ML	2 - 500 x 500 1 - 1210 x 500	1-2	1080 - 2160	240 / 480 (1) 120 / 240 (2)	500	2 x 58	2 x 8	1410 1540 850	1320 2050 780	210

(1) GN TRAYS 20 mm DEPTH
(2) GN TRAYS 120 mm DEPTH

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED



PERISTALTIC
DETERGENT DISPENSER

PTCR

CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

EPS

STEAM CONDENSER +
ENERGY RECOVERY



DRAIN PUMP

AB


AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED



PLATES RACK
CIMP000193



UNIVERSAL RACK
CIMP000194



METAL BASKET
CINAC003486




TRAY SUPPORT
CINAC003484

NOT INCLUDED




UNIVERSAL RACK
CINAC003485

TECHNICAL SCHEME

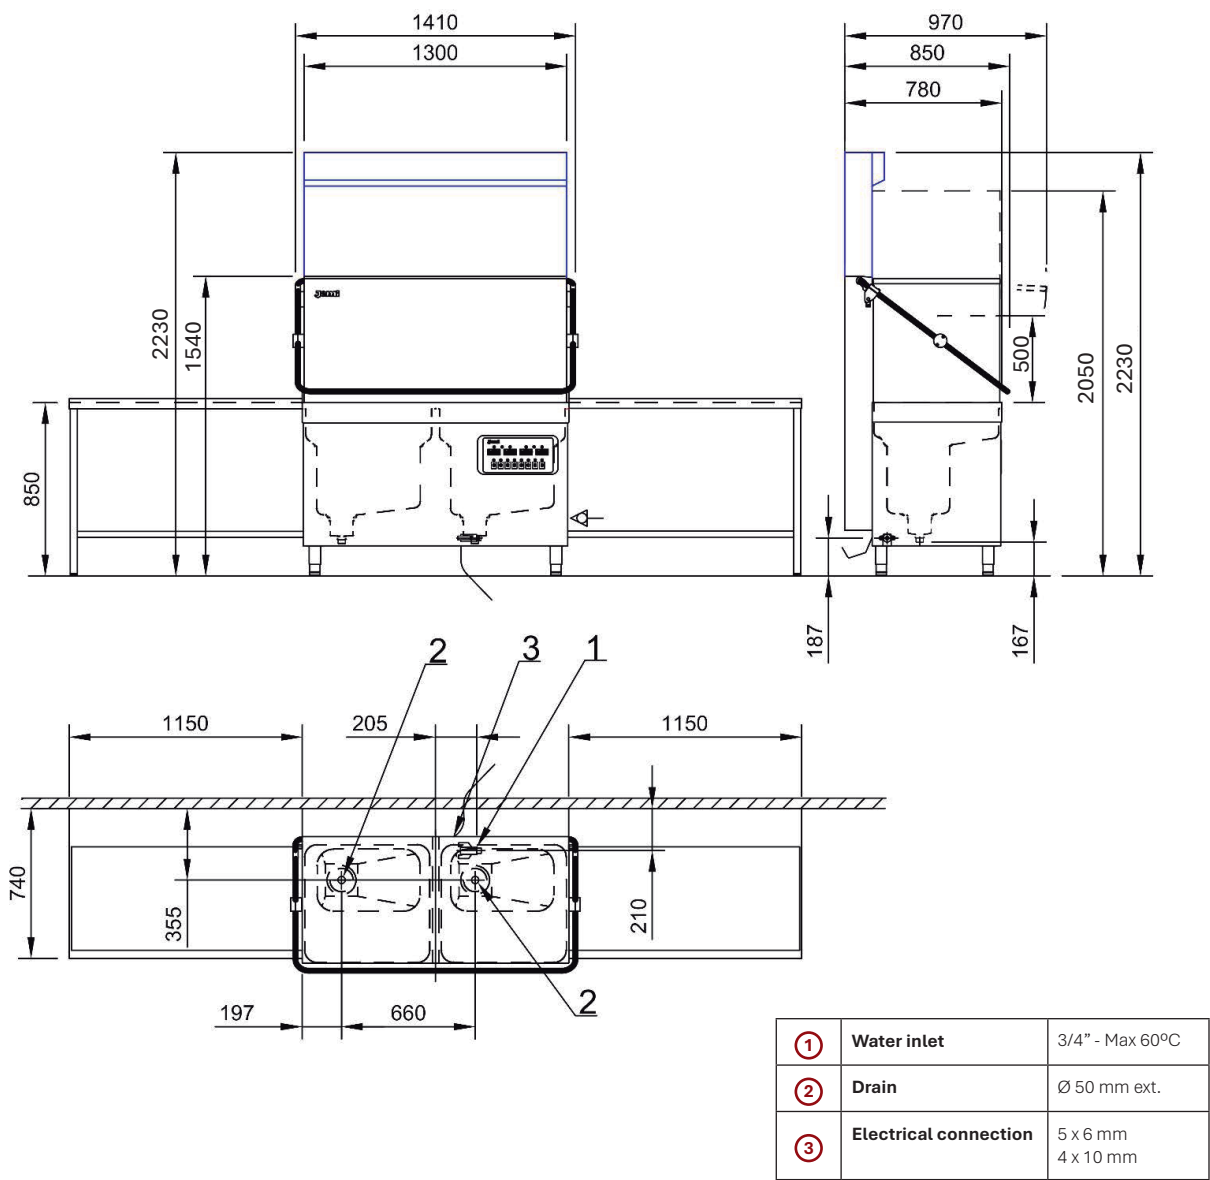

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE	 PRESSURE FOR THE WATER SUPPLY	 WASH PUMP POWER	 TANK ELEMENT HEATER	 BOILER ELEMENT HEATER	 TOTAL POWER	 CABLE LENGHT	 FUSE	 PACKED MEASURES	 PACKED WEIGHT
	L.	bar / kPa.	kW.	kW. / Ph.	kW. / Ph.	kW.	mm.	A.	mm.	Kg.
GS 102 ML	2 x 3	2-4 / 200 - 400	2 x 1.5 Opc. 2 x 2 2 x 500l	2 x 6 / 3~	2 x 6 / 3~ Opc. 2 x 9 / 3 ~	15 Opc. 22	1.5m. 5 x 6 mm², 400V. 3~ 4 x 10 mm², 230V. 3~	23,32		±320