JEMI
Simply Built to Last

GS 50 3P TECH LINE

400V / 3~ / 50HZ.
230V / 3~ / 60Hz

FRONT LOADING DISWASHER

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND BUILT-IN GUIDES FOR BASKETS, MADE OF AISI 304 STAINLESS STEEL.
- ROTATING WASH AND RINSE ARMS IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- WASH AND RINSE DISTRIBUTORS MADE OF STAINLESS STEEL.
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- DOUBLE FILTER IN STAINLESS STEEL WITH POLYPROPYLENE EXTERIOR.
- DIGITAL DISPLAY FOR RINSE TEMPERATURE VISUALIZATION.
- 2-MINUTE WASH CYCLE.

	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION GLASSES/HOUR uds.	PRODUCTION PLATES/HOUR uds.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm.	WEIGHT Kg.
GS 50 3P	500 x 500	2	**1440**	**480**	360	26	4	820 / 550 / 620	48

OPTIONS

INCLUDED

PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED

PERISTALTIC
DETERGENT DISPENSER

DRAIN PUMP

PTCR
CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

AB
AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED

PLATES RACK
#CIMP000193



UNIVERSAL RACK
#CIMP000194

CUTLERY RACK
CINAC003491

NOT INCLUDED

BASE
P25 - #LV000612
P40 -#LV000576

CUTLERY RACK
#CIMP000201

TECHNICAL SCHEME

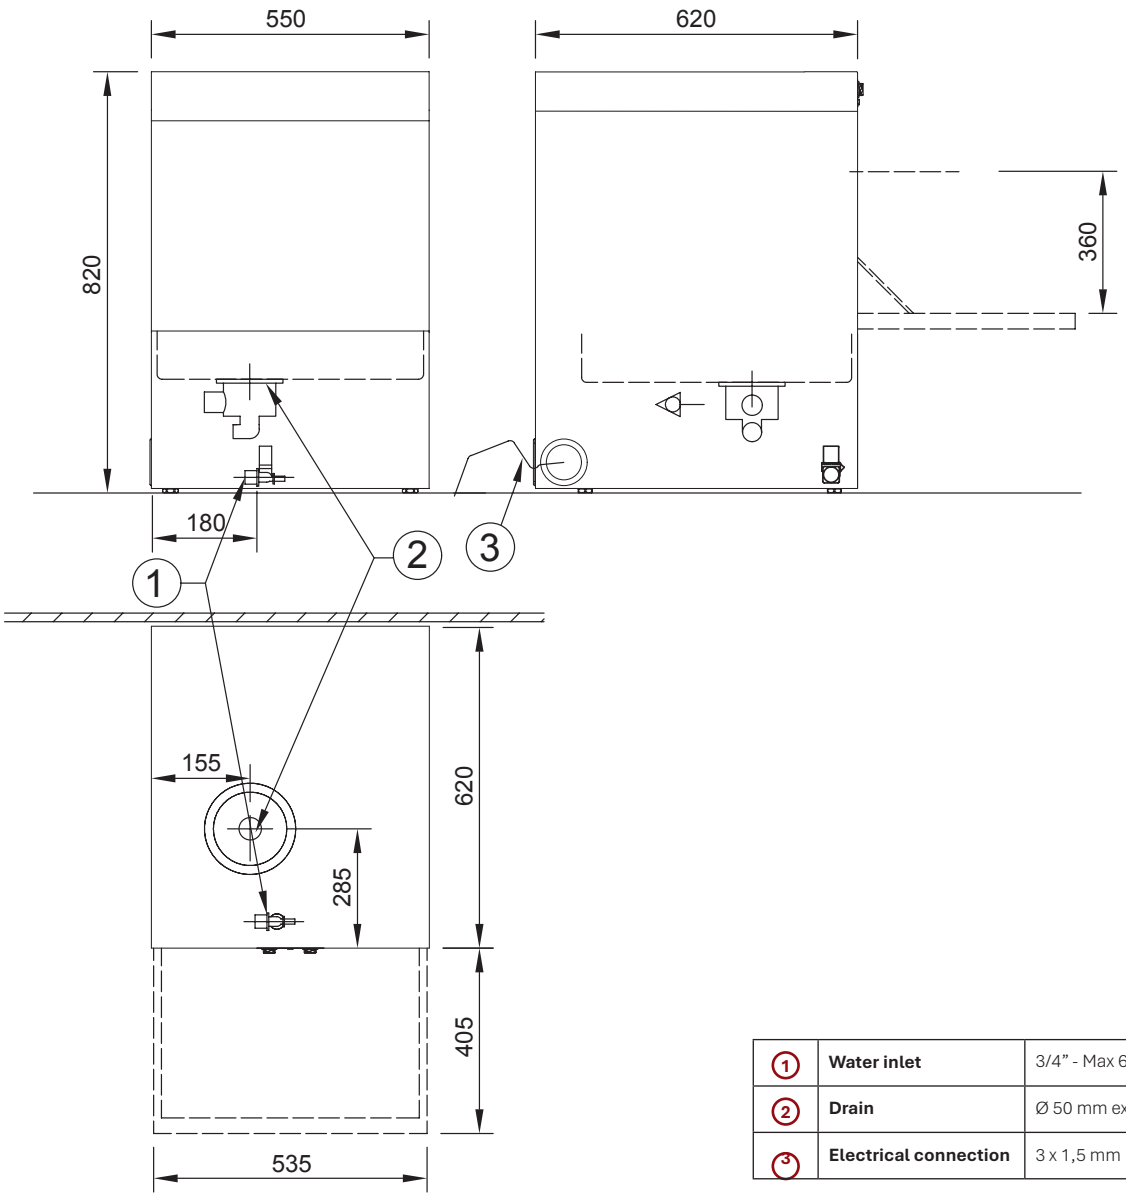

1	**Water inlet**	3/4" - Max 60ºC
2	**Drain**	Ø 50 mm ext.
3	**Electrical connection**	3 x 1,5 mm

OPERATING CONDITIONS

	WATER CONSUMPTTION BY CYCLE **L.**	PRESSURE FOR THE WATER SUPPLY **bar / kPa.**	WASH PUMP POWER **kW.**	TANK ELEMENT HEATER **kW. / Ph.**	BOILER ELEMENT HEATER **kW. / Ph.**	TOTAL POWER **kW.**	CABLE LENGHT **mm.**	FUSE **A.**	PACKED MEASURES **mm.**	PACKED WEIGHT **Kg.**
GS 50 3P	2,3	2–4 / 200 – 400	0,28	4,5 / III	6 / III	6,28	1,5 5 x 2,5 - 400 V 4 x 4 - 230 V	10,1	960 690 615	±71

JEMI
Simply Built to Last

Selva de Mar, 122-128
08020 Barcelona, SPAIN

T. +34 93 308 31 54
jemi@jemi.es | www.jemi.es