JEMI
Simply Built to Last

GS 60 TECH LINE

FRONT LOADING DISWASHER

400V / 3~ / 50Hz.
230V / 3~ / 50Hz

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND BUILT-IN GUIDES FOR BASKETS, MADE OF AISI 304 STAINLESS STEEL.
- ROTATING WASH AND RINSE ARMS IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- WASH AND RINSE DISTRIBUTORS MADE OF STAINLESS STEEL.
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- DOUBLE FILTER IN STAINLESS STEEL WITH POLYPROPYLENE EXTERIOR.
- DIGITAL DISPLAY FOR RINSE TEMPERATURE VISUALIZATION.
- 2-MINUTE WASH CYCLE.

	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION PLATES/HOUR uds.	PRODUCTION TRAYS/HOUR uds.	PRODUCTION BOXES/HOUR uds.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm.	WEIGHT Kg.
GS 60	500 x 500 600 x 500 Cajas 600 x 400	2	**720**	**120**	**30**	360	28	4	820 550 690	52

OPTIONS

INCLUDED

PERISTALTIC
RINSE AID DISPENSER

PTCR
CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

NOT INCLUDED

PERISTALTIC
DETERGENT DISPENSER

DRAIN PUMP

AB
AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED

UNIVERSAL RACK
CIMP000190

PLATES RACK
CIMP000191

CUTLERY RACK
CINAC003491

NOT INCLUDED

BASE
250 - LV000662

500 SIDE FREE BASKET
+ 5 TRAY SUPPORT
CIMP000244

TRAYS RACK 600 X 500
CIMP000192

3 TRAYS SUPPORT
CINAC003482

TECHNICAL SCHEME

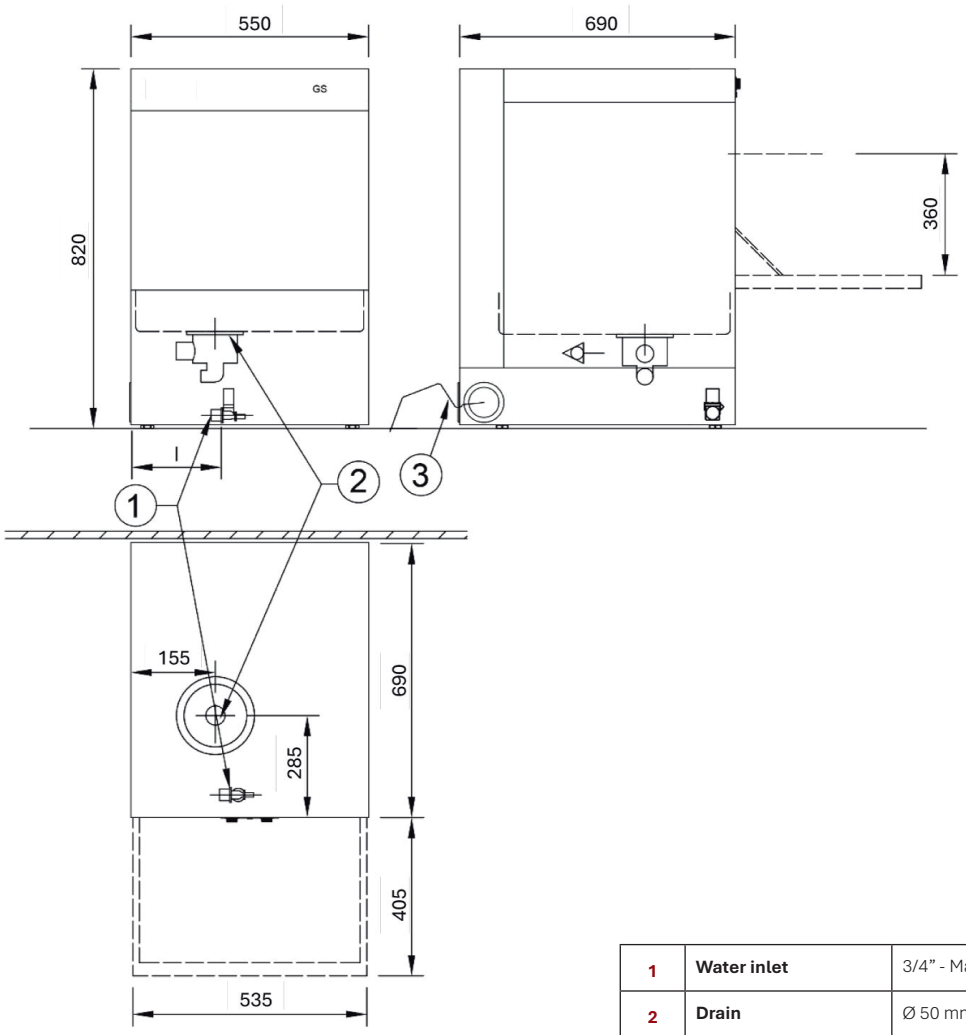

1	**Water inlet**	3/4" - Max 60ºC
2	**Drain**	Ø 50 mm ext.
3	**Electrical connection**	5 x 2,5 mm

OPERATING CONDITIONS

	WATER CONSUMPTTION BY CYCLE	PRESSURE FOR THE WATER SUPPLY	WASH PUMP POWER	TANK ELEMENT HEATER	BOILER ELEMENT HEATER	TOTAL POWER	CABLE LENGHT	FUSE	PACKED MEASURES	PACKED WEIGHT
	L.	**bar / kPa.**	**kW.**	**kW. / Ph.**	**kW. / Ph.**	**kW.**	**mm.**	**A.**	**mm.**	**Kg.**
GS 60	2,4	2–4 / 200 – 400	0,59	4,5 / 3~	6 / 3~	5,09	5 x 2,5 - 400 V 4 x 4 - 230 V	9,8	960 615 780	±69

JEMI
Simply Built to Last

Selva de Mar, 122-128
08020 Barcelona, SPAIN

T. +34 93 308 31 54
jemi@jemi.es | www.jemi.es