



Simply Built to Last

GS 60 TECH LINE

400V / 3~ / 50Hz.

230V / 3~ / 50Hz

FRONT LOADING DISWASHER

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- DOUBLE-WALL BODY WITH ROUNDED EDGES AND BUILT-IN GUIDES FOR BASKETS, MADE OF AISI 304 STAINLESS STEEL.
- ROTATING WASH AND RINSE ARMS IN AISI 304 STAINLESS STEEL, EASY TO REMOVE AND CLEAN.
- WASH AND RINSE DISTRIBUTORS MADE OF STAINLESS STEEL.
- DOUBLE-WALL DOOR WITH MAGNETIC SAFETY MICROSWITCH.
- DOUBLE FILTER IN STAINLESS STEEL WITH POLYPROPYLENE EXTERIOR.
- DIGITAL DISPLAY FOR RINSE TEMPERATURE VISUALIZATION.
- 2-MINUTE WASH CYCLE.



	 RACK DIMENSIONS mm.	 CYCLE TIME min	 PRODUCTION PLATES/HOUR uds.	 PRODUCTION TRAYS/HOUR uds.	 PRODUCTION BOXES/HOUR uds.	 USABLE HEIGHT mm.	 WASHING TANK CAPACITY L.	 BOILER CAPACITY L.	 MEASURES mm.	 WEIGHT Kg.
GS 60	500 x 500 600 x 500 Cajas 600 x 400	2	720	120	30	360	28	4	 550 820 690	52

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED



PERISTALTIC
DETERGENT DISPENSER



DRAIN PUMP

PTCR

CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

AB

AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED



UNIVERSAL RACK
CIMP000190



PLATES RACK
CIMP000191



CUTLERY RACK
CINAC003491

NOT INCLUDED



BASE
250 - LV000662



500 SIDE FREE BASKET
+ 5 TRAY SUPPORT
CIMP000244




TRAYS RACK 600 X 500
CIMP000192



3 TRAYS SUPPORT
CINAC003482

TECHNICAL SCHEME

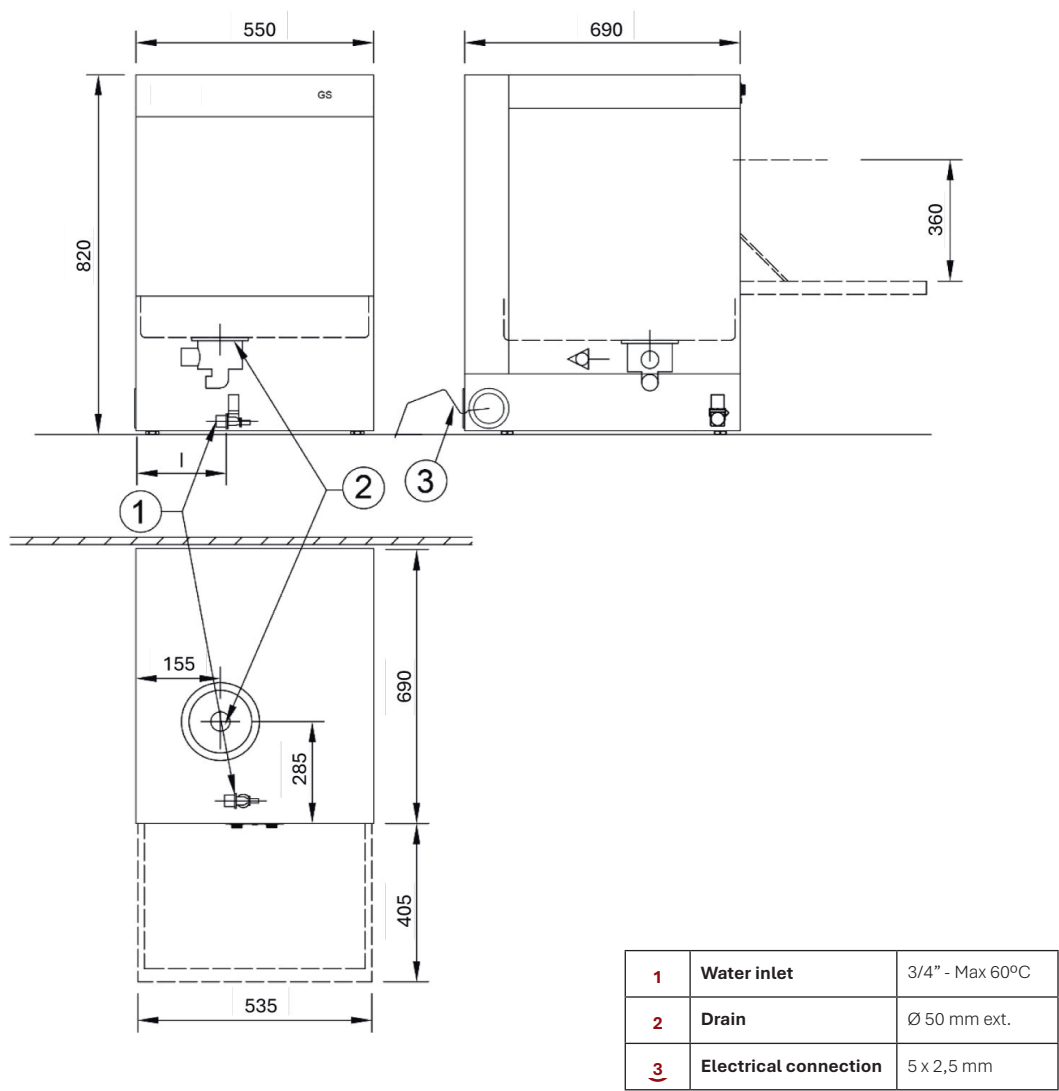

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE L.	 PRESSURE FOR THE WATER SUPPLY bar / kPa.	 WASH PUMP POWER kW.	 TANK ELEMENT HEATER kW. / Ph.	 BOILER ELEMENT HEATER kW. / Ph.	 TOTAL POWER kW.	 CABLE LENGHT mm.	 FUSE A.	 PACKED MEASURES mm.	 PACKED WEIGHT Kg.
GS 60	2,4	2-4 / 200 - 400	0,59	4,5 / 3~	6 / 3~	5,09	5 x 2,5 - 400 V 4 x 4 - 230 V	9,8	615 960 780	±69