



Simply Built to Last

KX 83 PRO LINE

400V / 3~ / 50HZ.

230V / 3~ / 60Hz

PASS THROUGH

FEATURES

- ELECTRONIC CONTROL WITH DIGITAL DISPLAY.
- ELECTRONIC CONTROL PANEL WITH 4 CONFIGURABLE PROGRAMS:
 - SPECIAL GLASSWARE QUALITY CYCLE (FOR OPTIMAL FINISH WITH ENHANCED GLASS TRANSPARENCY)
 - SHORT CYCLE
 - DISH CYCLE
 - LONG CYCLE FOR UTENSILS
- UNIQUE MIXED WASHING SYSTEM: ROTATING UPPER WASH ARMS AND FIXED LOWER WASH ARMS, ENSURING GREATER WASHING POWER AND ACCESS TO THE MOST HARD-TO-REACH AREAS.
- HIGH-PRECISION ELECTRONIC TEMPERATURE CONTROL.

PREPARED FOR CONNECTION TO AN OSMOSIS SYSTEM. REQUIRED TO ACHIEVE OPTIMAL RESULTS IN THE SPECIAL GLASSWARE CYCLE.
- DISPLAY OF WASH AND RINSE TEMPERATURES.
- FULL CONSTRUCTION IN AISI 304 STAINLESS STEEL.

INCLUDED OPTIONS:

- DD** PERISTALTIC DETERGENT AND RINSE AID DISPENSERS FOR PRECISE ELECTRONIC CHEMICAL DOSING.
- PTCR** CONSTANT TEMPERATURE AND PRESSURE RINSE SYSTEM, IDEAL FOR LOCATIONS WITH INSUFFICIENT WATER PRESSURE (<2 BAR).
- TS** THERMOSTOP SYSTEM: EXTENDS THE WASHING TIME AND STARTS THE RINSE PHASE ONLY WHEN THE CORRECT TEMPERATURE IS REACHED, ENSURING COMPLETE HYGIENE.
- SWS** SOFT WASHING START SYSTEM TO PREVENT POSSIBLE GLASS BREAKAGE.



	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION GLASSES/HOUR u.	PRODUCTION PLATES/HOUR u.	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm	MEASURES WITHOUT HANDLE / OPEN mm	WEIGHT Kg.
KX 83	500 x 500	4 PROGRAMAS	600	640	440	39	8	755 1480 850	665 1940 780	125

OPTIONS

INCLUDED



NOT INCLUDED



ACCESSORIES

INCLUDED



GLASS ROD RACK
CINAC010668

NOT INCLUDED



GLASS ROD RACK
CINAC010668




UNIVERSAL ROD RACK
CINAC003465



PLATE ROD RACK
CINAC003438

TECHNICAL SCHEME

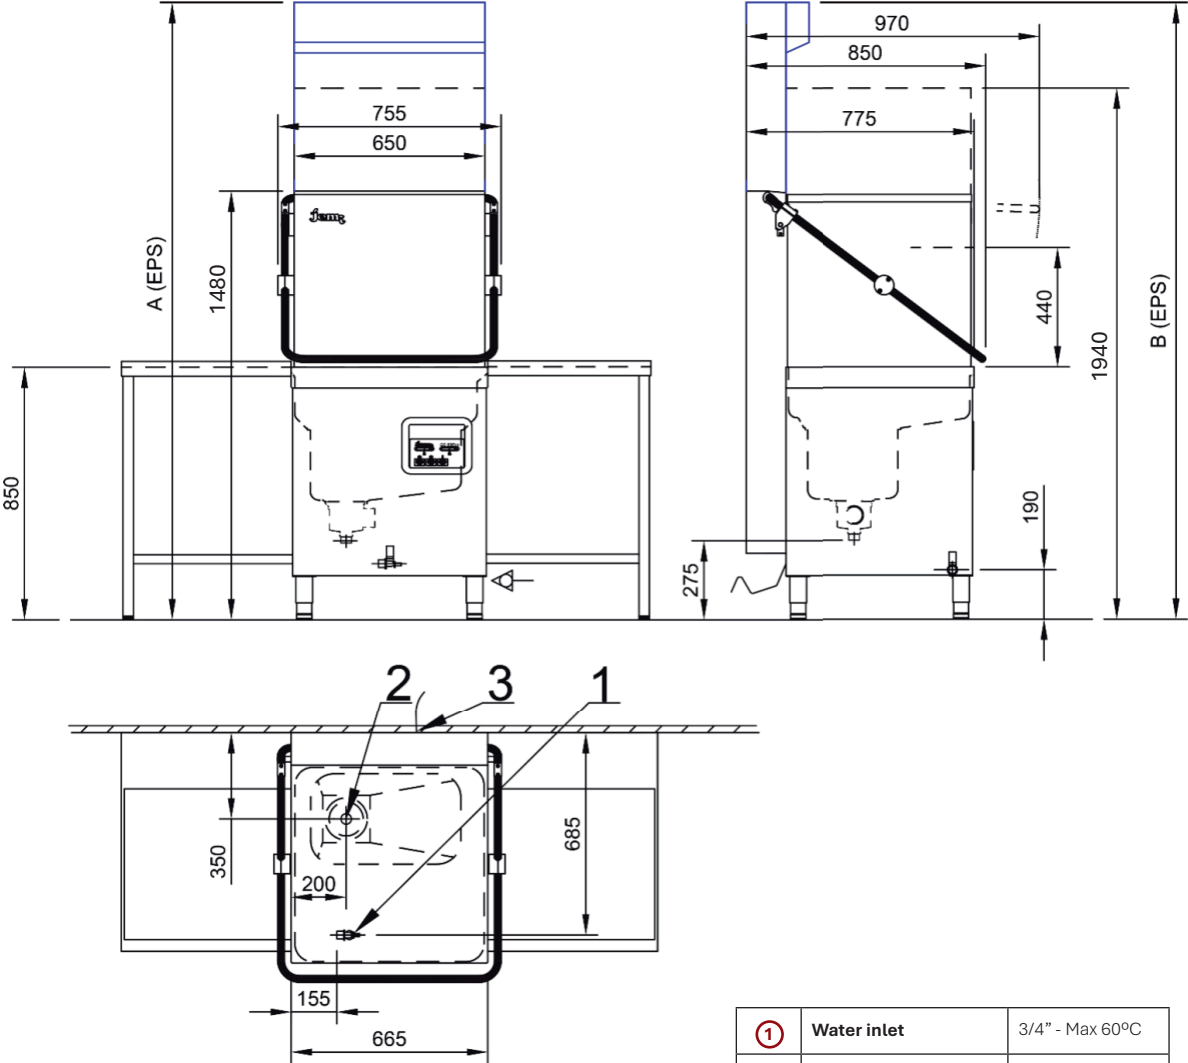

①	Water inlet	3/4" - Max 60°C
②	Drain	Ø 50 mm ext.
③	Electrical connection	5 x 2,5 mm 4 x 4 mm

OPERATING CONDITIONS

	WATER CONSUMPTION BY CYCLE L.	PRESSURE FOR THE WATER SUPPLY bars / kpa.	WASH PUMP POWER Kw.	TANK ELEMENT HEATER Kw. / Ph.	BOILER ELEMENT HEATER Kw. / Ph.	TOTAL POWER Kw.	CABLE LENGHT m.	FUSE A	PACKED MEASURES mm	PACKED WEIGHT Kg.
KX 83	2,4 / 2,6	2-4 / 200 - 400	0,75	6 / III	6 / III	6,75	1,5m. 5x2,5mm².400V.III 4x4mm².230V.III	12,41	820 1620 860	±160