



Simply Built to Last

GS 60 PLUS

400V / 3~ / 50HZ.
230V / 3~ / 60Hz

UTENSIL WASHERS

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- LARGE LOAD CAPACITY, IDEAL FOR COMFORTABLY WASHING POTS AND LARGE UTENSILS WITHOUT SPACE LIMITATIONS.
- MIXED WASHING SYSTEM: ROTATING AND FIXED SPRAY ARMS IN AISI 304 STAINLESS STEEL.
- VERTICAL OPENING SYSTEM THAT MINIMIZES OPENING SPACE WHILE MAXIMIZING CAVITY CAPACITY AND FRONT-LOADING EASE OF USE.
- EASY-REMOVAL FILTER.
- 2 MINUTE CYCLE, THE LATTER ADJUSTABLE.
- CONTINUOUS WASH PUSH BUTTON, AND MANUAL RINSING.
- INTEGRATED AISI 304 TANK WITH ROUNDED CORNERS AND SEAMLESS CONSTRUCTION.
- AISI 304 STAINLESS STEEL BODY STRUCTURE.



	 RACK DIMENSIONS mm.	 CYCLE TIME min	 PRODUCTION GLASSES/HOUR uds.	 PRODUCTION PLATES/HOUR uds.	 PRODUCTION RACK/HOUR	 USABLE HEIGHT mm.	 WASHING TANK CAPACITY L.	 BOILER CAPACITY L.	 MEASURES mm.	 WEIGHT Kg.
GS 60 PLUS	500 X 500 500 X 600	2	1600	640	30	450	64	8	 550 1415 760	87

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED



PERISTALTIC
DETERGENT DISPENSER



DRAIN PUMP

PTCR

CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

AB

AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED



UNIVERSAL RACK
CIMP000190



PLATE RACK
CIMP000191




TRAY RACK
CIMP000192



TRAY SUPPORT
CINAC003482

TECHNICAL SCHEME

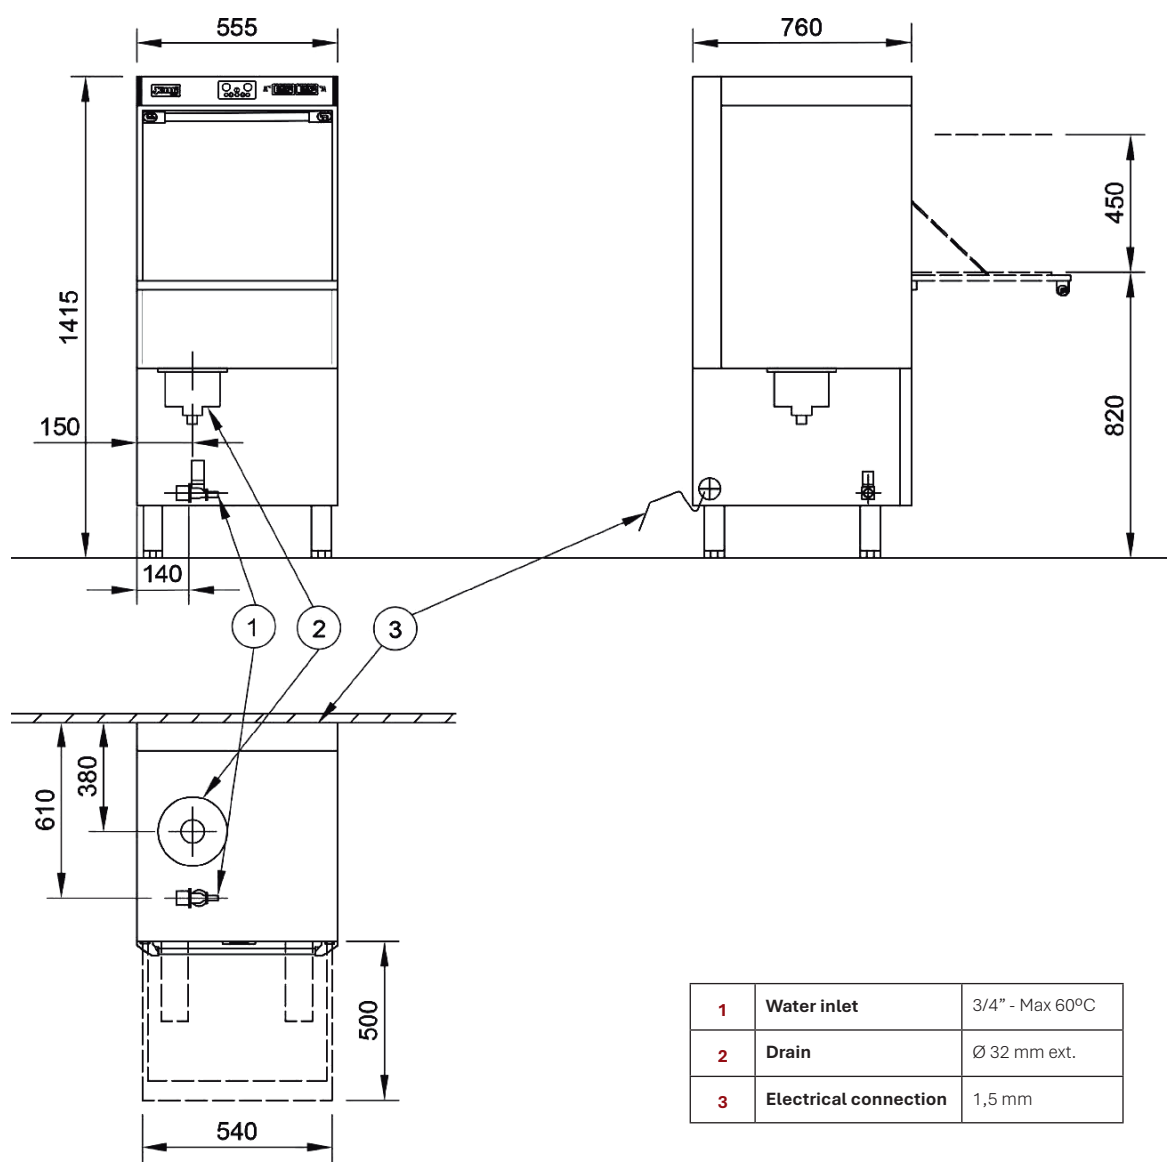

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE L.	 PRESSURE FOR THE WATER SUPPLY bar / kPa.	 WASH PUMP POWER kW.	 TANK ELEMENT HEATER kW. / Ph.	 BOILER ELEMENT HEATER kW. / Ph.	 TOTAL POWER kW.	 CABLE LENGHT mm.	 FUSE A.	 PACKED MEASURES mm.	 PACKED WEIGHT Kg.
GS 60 PLUS	2,4	2-4 / 200 - 400	0,75	4,5 / 3~	6 / 3~	6,75	1,5 5 x 2,5. 400V / 3~ 4 x 6. 230V / 3~	-	1630 860 820	±111