JEMI
Simply Built to Last

GS 60 PLUS

400V / 3~ / 50HZ.
230V / 3~ / 60Hz

UTENSIL WASHERS

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- LARGE LOAD CAPACITY, IDEAL FOR COMFORTABLY WASHING POTS AND LARGE UTENSILS WITHOUT SPACE LIMITATIONS.
- MIXED WASHING SYSTEM: ROTATING AND FIXED SPRAY ARMS IN AISI 304 STAINLESS STEEL.
- VERTICAL OPENING SYSTEM THAT MINIMIZES OPENING SPACE WHILE MAXIMIZING CAVITY CAPACITY AND FRONT-LOADING EASE OF USE.
- EASY-REMOVAL FILTER.
- 2 MINUTE CYCLE, THE LATTER ADJUSTABLE.
- CONTINUOUS WASH PUSH BUTTON, AND MANUAL RINSING.
- INTEGRATED AISI 316 TANK WITH ROUNDED CORNERS AND SEAMLESS CONSTRUCTION.
- AISI 304 STAINLESS STEEL BODY STRUCTURE.

	RACK DIMENSIONS mm.	CYCLE TIME min	PRODUCTION GLASSES/HOUR uds.	PRODUCTION PLATES/HOUR uds.	PRODUCTION RACK/HOUR	USABLE HEIGHT mm.	WASHING TANK CAPACITY L.	BOILER CAPACITY L.	MEASURES mm.	WEIGHT Kg.
GS 60 PLUS	500 X 500 500 X 600	2	**1600**	**640**	**30**	450	64	8	550 × 1415 × 760	87

OPTIONS

INCLUDED

PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED

PERISTALTIC
DETERGENT DISPENSER

DRAIN PUMP

PTCR
CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

AB
AIR BREAK
(Requires PTCR installed)

ACCESSORIES

INCLUDED

UNIVERSAL RACK
CIMP000190

PLATE RACK
CIMP000191

TRAY RACK
CIMP000192

TRAY SUPPORT
CINAC012900

TECHNICAL SCHEME

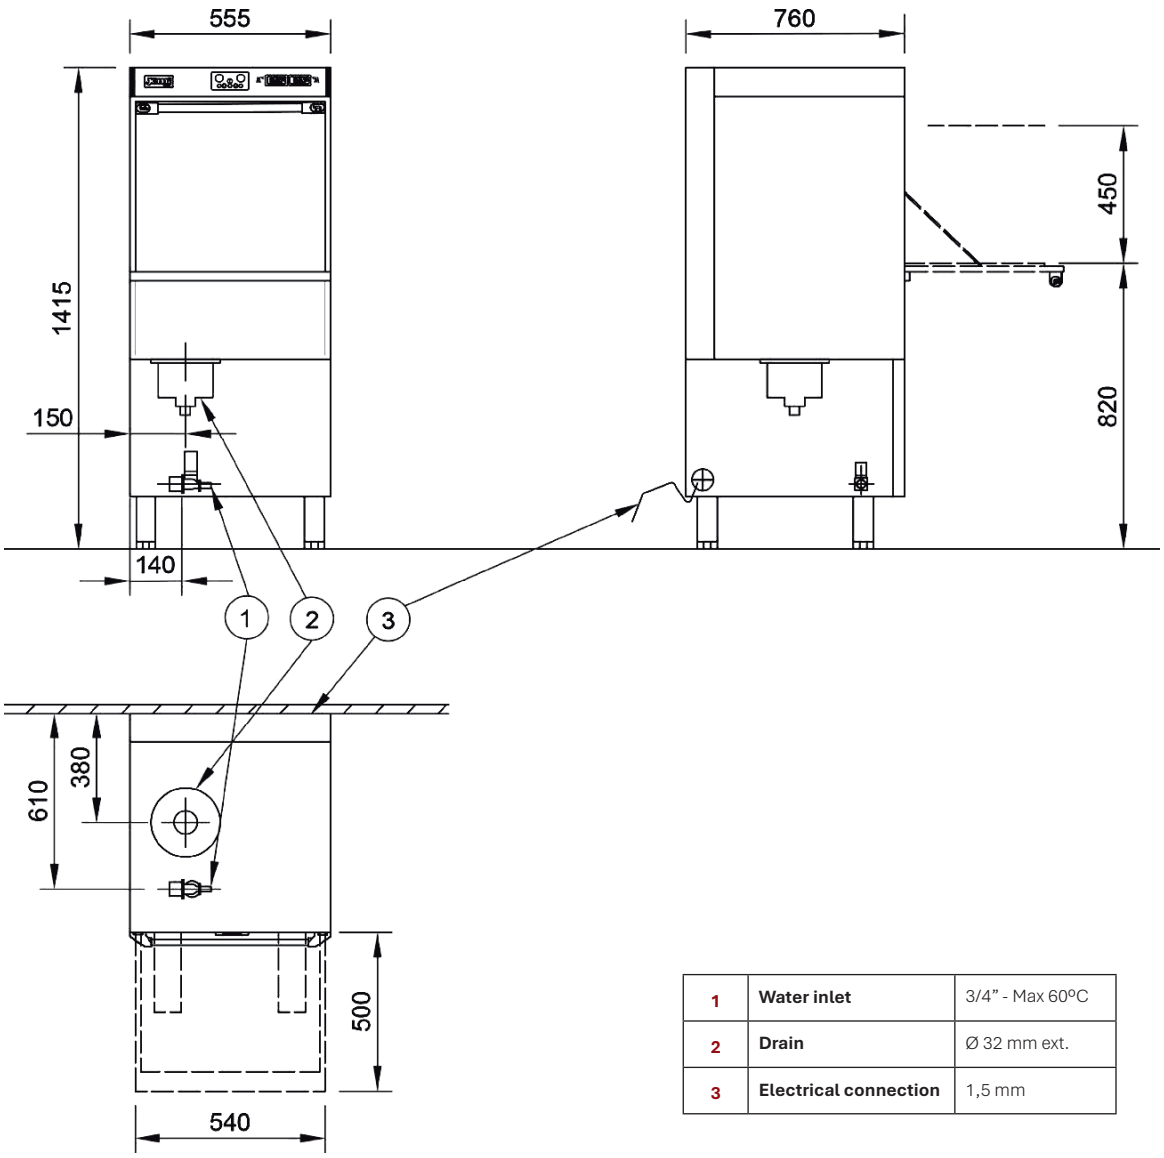

1	**Water inlet**	3/4" - Max 60ºC
2	**Drain**	Ø 32 mm ext.
3	**Electrical connection**	1,5 mm

OPERATING CONDITIONS

	WATER CONSUMPTTION BY CYCLE	PRESSURE FOR THE WATER SUPPLY	WASH PUMP POWER	TANK ELEMENT HEATER	BOILER ELEMENT HEATER	TOTAL POWER	CABLE LENGHT	FUSE	PACKED MEASURES	PACKED WEIGHT
	L.	**bar / kPa.**	**kW.**	**kW. / Ph.**	**kW. / Ph.**	**kW.**	**mm.**	**A.**	**mm.**	**Kg.**
GS 60 PLUS	2,4	2–4 / 200 – 400	0,75	4,5 / 3~	6 / 3~	6,75	1,5 5 x 2,5. 400V / 3~ 4 x 6. 230V / 3~	-	1630 860 820	±111

JEMI
Simply Built to Last

Selva de Mar, 122-128
08020 Barcelona, SPAIN

T. +34 93 308 31 54
jemi@jemi.es | www.jemi.es