



Simply Built to Last

GSP 45


400V / 3~ / 50HZ.
230V / 3~ / 60Hz

UTENSIL WASHERS

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- LARGE LOAD CAPACITY, IDEAL FOR COMFORTABLY WASHING POTS AND LARGE UTENSILS WITHOUT SPACE LIMITATIONS.
- MIXED WASHING SYSTEM: ROTATING AND FIXED SPRAY ARMS IN AISI 304 STAINLESS STEEL.
- VERTICAL OPENING SYSTEM THAT MINIMIZES OPENING SPACE WHILE MAXIMIZING CAVITY CAPACITY AND FRONT-LOADING EASE OF USE.
- EASY-REMOVAL FILTER.
- 2 AND 4 MINUTE CYCLES, THE LATTER ADJUSTABLE.
- CONTINUOUS WASH PUSH BUTTON, AND MANUAL RINSING.
- INTEGRATED AISI 316 TANK WITH ROUNDED CORNERS AND SEAMLESS CONSTRUCTION.
- AISI 304 STAINLESS STEEL BODY STRUCTURE.



	 RACK DIMENSIONS mm.	 CYCLE TIME min	 PRODUCTION GLASSES/HOUR uds.	 PRODUCTION PLATES/HOUR uds.	 PRODUCTION RACK/HOUR	 USABLE HEIGHT mm.	 WASHING TANK CAPACITY L.	 BOILER CAPACITY L.	 MEASURES mm.	 WEIGHT Kg.
GSP 45	742 x 697 x 110	2-4*	-	-	30-15*	700	65	8		210

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED



PERISTALTIC
DETERGENT DISPENSER



DRAIN PUMP

PTCR

CONSTANT-TEMP & PRESSURE
RINSE SYSTEM

AB

AIR BREAK
(Requires PTCR installed)

EPS

STEAM CONDENSER
+ ENERGY RECOVERY

ACCESSORIES

INCLUDED




UNIVERSAL RACK
745 x 695 x 115
CINAC003489



TRAY SUPPORT
CINAC003477

TECHNICAL SCHEME

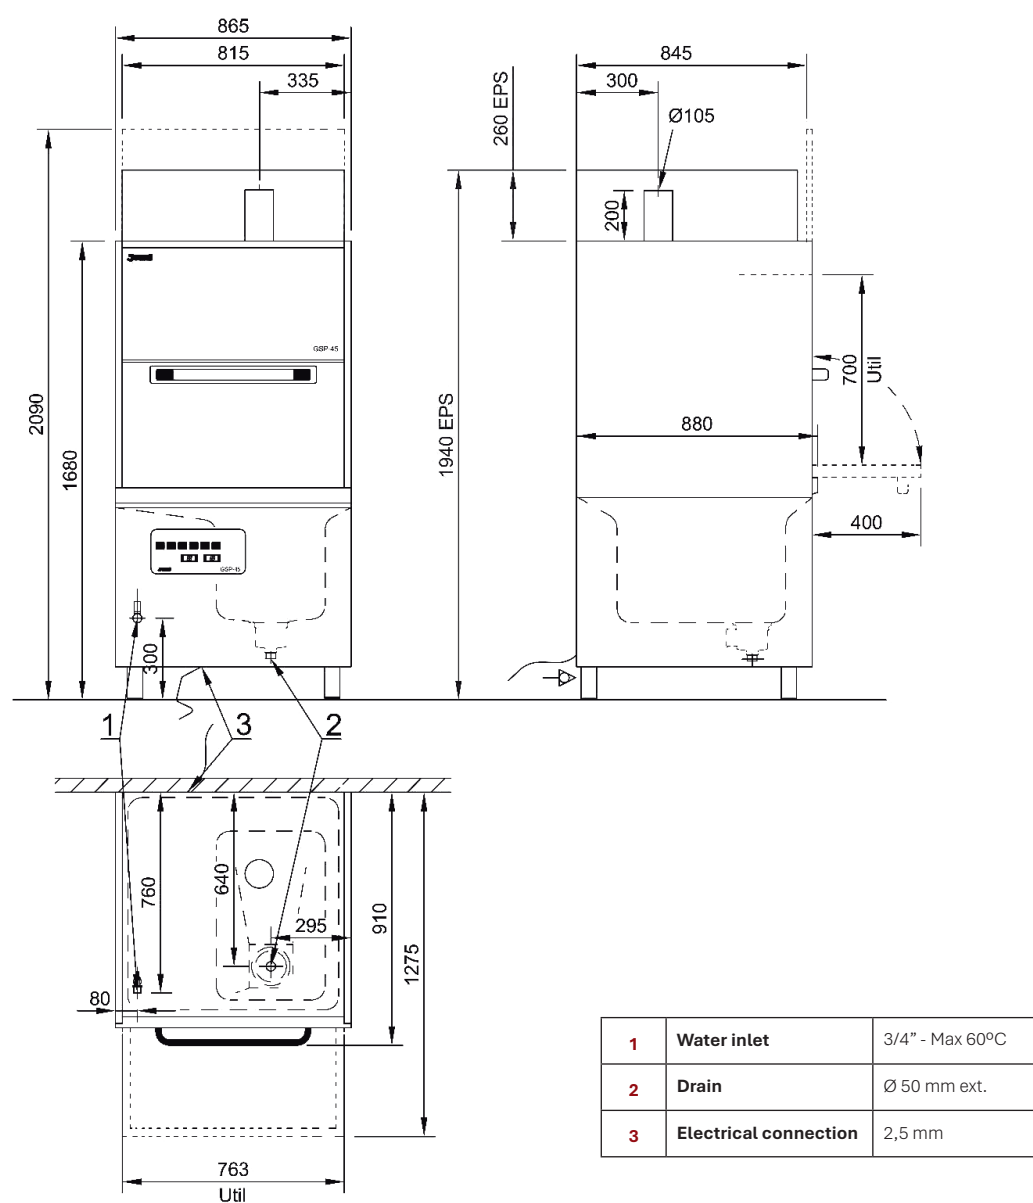

OPERATING CONDITIONS

	 WATER CONSUMPTION BY CYCLE	 PRESSURE FOR THE WATER SUPPLY	 WASH PUMP POWER	 TANK ELEMENT HEATER	 BOILER ELEMENT HEATER	 TOTAL POWER	 CABLE LENGHT	 FUSE	 PACKED MEASURES	 PACKED WEIGHT
	L.	bar / kPa.	kW.	kW. / Ph.	kW. / Ph.	kW.	mm.	A.	mm.	Kg.
GSP 45	3	2-4 / 200 - 400	2,6	9 / 3~	6 / 3~	11,6	2,5 5 x 6.400V / 3~ 4 x 10.230V / 3~	18,8	1050 2250 1080	±280