



Simply Built to Last

GSP 46

400V / 3~ / 50HZ.
230V / 3~ / 60Hz

UTENSIL WASHERS

FEATURES

- 100% ELECTROMECHANICAL CONTROLS AND TIMER.
- LARGE LOAD CAPACITY, IDEAL FOR COMFORTABLY WASHING POTS AND LARGE UTENSILS WITHOUT SPACE LIMITATIONS.
- MIXED WASHING SYSTEM: ROTATING AND FIXED SPRAY ARMS IN AISI 304 STAINLESS STEEL.
- VERTICAL OPENING SYSTEM THAT MINIMIZES OPENING SPACE WHILE MAXIMIZING CAVITY CAPACITY AND FRONT-LOADING EASE OF USE.
- EASY-REMOVAL FILTER.
- 2 AND 4 MINUTE CYCLES, THE LATTER ADJUSTABLE.
- CONTINUOUS WASH PUSH BUTTON, AND MANUAL RINSING.
- INTEGRATED AISI 316 TANK WITH ROUNDED CORNERS AND SEAMLESS CONSTRUCTION.
- AISI 304 STAINLESS STEEL BODY STRUCTURE.



	 RACK DIMENSIONS mm.	 CYCLE TIME min	 PRODUCTION GLASSES/HOUR uds.	 PRODUCTION PLATES/HOUR uds.	 PRODUCTION RACK/HOUR	 USABLE HEIGHT mm.	 WASHING TANK CAPACITY L.	 BOILER CAPACITY L.	 MEASURES mm.	 WEIGHT Kg.
GSP 46	1292 x 693 x 110	2-4*	-	-	30-15*	700	98	2 x 8		289

OPTIONS

INCLUDED



PERISTALTIC
RINSE AID DISPENSER

NOT INCLUDED



PERISTALTIC
DETERGENT DISPENSER



DRAIN PUMP

AB

AIR BREAK
(Requires PTCR installed)

EPS

STEAM CONDENSER
+ ENERGY RECOVERY

ACCESSORIES


INCLUDED



UNIVERSAL RACK
1260 x 690 x 110
CINAC003475



TRAY SUPPORT
CINAC003477

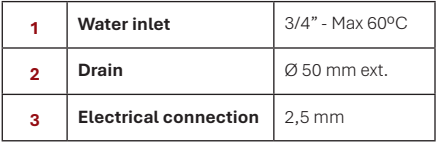

GSP 46	3 + 3	2-4 / 200 – 400	2 x ,6	9 / 3~	12 / 3~	17,2	2,5 5 x 6. 400V / 3~ 4 x 10. 230V / 3~	28,9		±280
---------------	-------	-----------------	--------	--------	---------	------	--	------	--	------